


# PRW Series

## Cylindrical cable connector type proximity sensor

### ■ Features

- Shorten the time of maintenance with the body
- Improved the noise resistance with dedicated IC
- Built-in reverse polarity protection circuit (DC 3-wire type)
- Built-in surge protection circuit
- Built-in overcurrent protect protection circuit
- Waterproof structure IP67 (IEC standard)
- Replaceable for micro switches and limit switches

 Please read "Caution for your safety" in operation manual before using.



2-wire non-polarity

Line-up



### ■ Specifications

#### • DC 2-wire type

※When the □ model name is X, it is non-polarity model.

Model	PRWT08-1.5DO PRWT08-1.5DC PRWT08-1.5DO-I PRWT08-1.5DC-I PRWT08-1.5DO-V PRWT08-1.5DC-V PRWT08-1.5DO-I-V PRWT08-1.5DC-I-V	PRWT08-2DO PRWT08-2DC PRWT08-2DO-I PRWT08-2DC-I PRWT08-2DO-I-V PRWT08-2DC-I-V	PRWT12-2DO PRWT12-2DC PRWT12-2DO-I PRWT12-2DC-I	PRWT12-4DO PRWT12-4DC PRWT12-4DO-I PRWT12-4DC-I	PRWT18-5DO PRWT18-5DC PRWT18-5DO-I PRWT18-5DC-I	PRWT18-8DO PRWT18-8DC PRWT18-8DO-I PRWT18-8DC-I	PRWT30-10DO PRWT30-10DC PRWT30-10DO-I PRWT30-10DC-I PRWT30-10DO-V PRWT30-10DC-I-V	PRWT30-15DO PRWT30-15DC PRWT30-15DO-I PRWT30-15DC-I PRWT30-15DO-V PRWT30-15DC-I-V
Sensing distance	1.5mm	2mm	4mm	5mm	8mm	10mm	15mm	
Hysteresis	Max. 10% of sensing distance							
Standard sensing target	8×8×1mm(Iron)		12×12×1mm(Iron)		18×18×1mm (Iron)	25×25×1mm (Iron)	30×30×1mm (Iron)	45×45×1mm (Iron)
Setting distance	0 to 1.05mm	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm	
Power supply (Operation voltage)	12-24VDC (10-30VDC)							
Leakage current	Max. 0.6mA							
Response frequency※1	1.5kHz	1kHz	1.5kHz	500Hz	350Hz	400Hz	200Hz	
Residual voltage※2	Max. 3.5V(Non-polarity type is Max. 5V)							
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20℃(For PRWT08 series : ±20% Max,)							
Control output	2 to 100mA							
Insulation resistance	Min. 50MΩ(at 500VDC meggera)							
Dielectric strength	1500VAC 50/60Hz for 1 minute							
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours							
Shock	500m/s²(50G)in each of X, Y, Z directions for 3 times							
Indicator	Operation indicator(red LED)							
Environment	Ambient temperature	-25 to 70℃, storage : -30 to 80℃						
	Ambient humidity	35 to 95% RH, storage :35 to 95% RH						
Protection circuit	Surge protection circuit		Surge protection circuit, Overcurrent protection circuit					
Protection	IP67(IEC standard)							
Material	Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: PBT, Standard cable(Black): Polyvinyl chloride(PVC), Oil resistant cable(Gray): Oil resistant Polyvinyl chloride(PVC)							
Cable	ø4, 2-wire, 300mm, M12 connector				ø5, 2-wire, 300mm, M12 connector			
Approval	CE							
Unit weight	Approx. 32g		Approx. 42g		Approx. 58g		Approx. 122g	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: Before using non-polarity type, check the condition of connected device because residual voltage is 5V.

※Please fasten the vibration part with Teflon type.

※The '□' of model name is for power type. 'D' is 12-24VDC, 'X' is non-polarity12-24VDC.

※The last 'V' of model name is for the model with oil-resistance reinforced cable.

※Environment resistance is rated at no freezing or condensation.

# Cylindrical Cable Connector type

## ■ Specifications

### ● DC 3-wire type

Model	PRW08-1.5DN PRW08-1.5DP PRW08-1.5DN2 PRW08-1.5DP2 PRW08-1.5DN-V PRW08-1.5DP-V PRWL08-1.5DN PRWL08-1.5DP PRWL08-1.5DN2 PRWL08-1.5DP2	PRW08-2DN PRW08-2DP PRW08-2DN2 PRW08-2DP2 PRW08-2DN-V PRW08-2DP-V PRWL08-2DN PRWL08-2DP PRWL08-2DN2 PRWL08-2DP2	PRW12-2DN PRW12-2DP PRW12-2DN2 PRW12-2DP2	PRW12-4DN PRW12-4DP PRW12-4DN2 PRW12-4DP2	PRW18-5DN PRW18-5DP PRW18-5DN2 PRW18-5DP2 PRWL18-5DN PRWL18-5DP PRWL18-5DN2 PRWL18-5DP2	PRW18-8DN PRW18-8DP PRW18-8DN2 PRW18-8DP2 PRWL18-8DN PRWL18-8DP PRWL18-8DN2 PRWL18-8DP2	PRW30-10DN PRW30-10DP PRW30-10DN2 PRW30-10DP2 PRW30-10DN-V PRW30-10DP-V PRWL30-10DN PRWL30-10DP PRWL30-10DN2 PRWL30-10DP2	PRW30-15DN PRW30-15DP PRW30-15DN2 PRW30-15DP2 PRW30-15DN-V PRW30-15DP-V PRWL30-15DN PRWL30-15DP PRWL30-15DN2 PRWL30-15DP2	
	Sensing distance	1.5mm	2mm	4mm	5mm	8mm	10mm	15mm	
	Hysteresis	Max. 10% of sensing distance							
	Standard sensing target	8×8×1mm(Iron)		12×12×1mm(Iron)		18×18×1mm(Iron)	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)
	Setting distance	0 to 1.05mm	0 to 1.4mm		0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm
	Power supply (Operation voltage)	12-24VDC (10-30VDC)							
	Current consumption	Max. 10mA							
	Response frequency※1	1.5kHz	1kHz	1.5kHz	500Hz		350Hz	400Hz	200Hz
	Residual voltage	Max. 2V		Max. 1.5V					
	Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C(For PRW(L)08 series : ±20% Max.)							
Control output	200mA								
Insulation resistance	Min. 50MΩ(at 500VDC megger)								
Dielectric strength	1500VAC 50/60Hz for 1minute								
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours								
Shock	500m/s <sup>2</sup> (50G) in each of X, Y, Z directions for 3 times								
Indicator	Operation indicator(red LED)								
Environ-ment	Ambient temperature	-25 to 70°C, storage : -30 to 80°C							
	Ambient humidity	35 to 95%RH, storage :35 to 95%RH							
Protection circuit	Surge protection circuit, Reverse polarity protecticon circuit, Overcurrent protection circuit								
Protection	IP67(IEC standard)								
Material	Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: PBT, Standard cable(Black): Polyvinyl chloride(PVC), Oil resistant cable(Gray): Oil resistant Polyvinyl chlorde(PVC)								
Cable	ø4, 3-wire, 300mm, M12 connector				ø5, 3-wire, 300mm, M12 connector				
Approval	CE								
Unit weight	PRW : Approx. 32g PRWL : Approx. 34g		PRW : Approx. 42g		PRW : Approx. 58g PRWL : Approx. 78g		PRW : Approx. 122g PRWL : Approx. 158g		

### ● AC 2-wire type

Model	PRW12-2AO PRW12-2AC	PRW12-4AO PRW12-4AC	PRW18-5AO PRW18-5AC PRWL18-5AO PRWL18-5AC	PRW18-8AO PRW18-8AC PRWL18-8AO PRWL18-8AC	PRW30-10AO PRW30-10AC PRWL30-10AO PRWL30-10AC	PRW30-15AO PRW30-15AC PRWL30-15AO PRWL30-15AC
Sensing distance	2mm	4mm	5mm	8mm	10mm	15mm
Hysteresis	Max. 10% of sensing distance					
Standard sensing target	12×12×1mm(Iron)		18×18×1mm(Iron)	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)
Setting distance	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm
Power supply (Operation voltage)	100-240VAC (85-264VAC)					
Leakage current	Max. 2.5mA					
Response frequency※ <sup>1</sup>	20Hz					
Residual voltage	Max. 10V					
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20℃					
Control output	5 to 150mA		5 to 200mA			
Insulation resistance	Min. 50MΩ(at 500VDC megger)					
Dielectric strength	2,500VAC 50/60Hz for 1minute					
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours					
Shock	500m/s²(50G) in each of X, Y, Z directions for 3 times					
Indicator	Operation indicator(red LED)					
Environ-ment	- Ambient temperature : -25 to 70℃, storage : -30 to 80℃ - Ambient humidity : 35 to 95%RH, storage :35 to 95%RH					
Protection circuit	Surge protection circuit					
Protection	IP67(IEC standard)					
Material	Case/Nut: Nikel plated Brass, Washer: Nikel plated Iron, Sensing surface: PBT, Standard cable(Black): Polyvinyl chloride(PVC)					
Cable	ø4, 2-wire, 300mm, M12 connector		ø5, 2-wire, 300mm, M12 connector			
Approval	CE					
Unit weight	PRW : Approx. 42g		PRW : Approx. 66g, PRWL : Approx. 78g		PRW : Approx. 122g, PRWL : Approx. 158g	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※The last 'V' of model name is for the model with oil-resistance reinforced cable.

※Environment resistance is rated at no freezing or condensation.

(A)	Photo electric sensor
(B)	Fiber optic sensor
(C)	Door/Area sensor
(D)	Proximity sensor
(E)	Pressure sensor
(F)	Rotary encoder
(G)	Connector/Socket
(H)	Temp. controller
(I)	SSR/Power controller
(J)	Counter
(K)	Timer
(L)	Panel meter
(M)	Tacho/Speed/ Pulse meter
(N)	Display unit
(O)	Sensor controller
(P)	Switching power supply
(Q)	Stepping motor& Driver&Controller
(R)	Graphic/Logic panel
(S)	Field network device
(T)	Software
(U)	Other

# PRW Series



## ■ Dimensions

(unit: mm)

### ● PRWT08-1.5D□(-I)





### ● PRW08-1.5D□

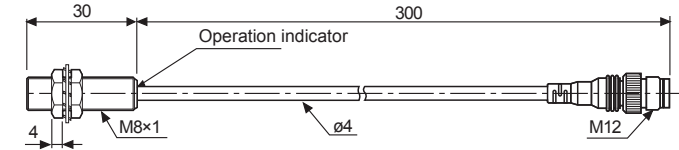

### ● PRWT08-2D□(-I)




### ● PRW08-2D□

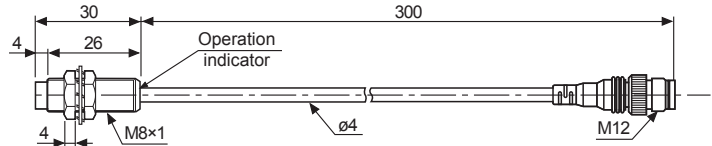

### ● PRWT12-2D□(-I)




### ● PRW12-2D□

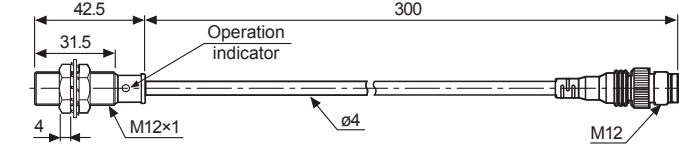

### ● PRWT12-4D□(-I)




### ● PRW12-4D□

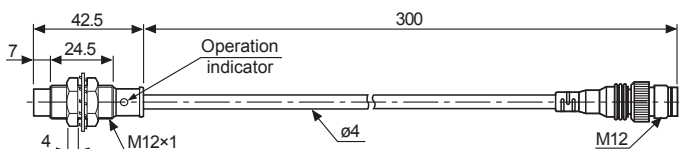

### ● PRWT18-5D□(-I)




### ● PRW18-5D□

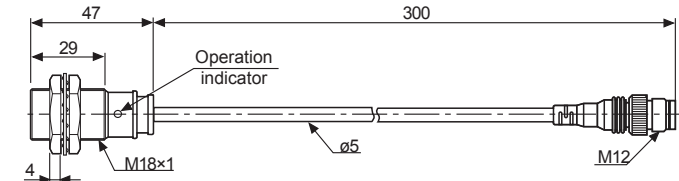


### ● PRWT18-8D□(-I)





### ● PRW18-8D□

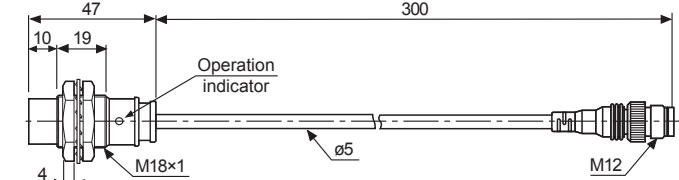


### ● PRWT30-10D□(-I)





### ● PRW30-10D□

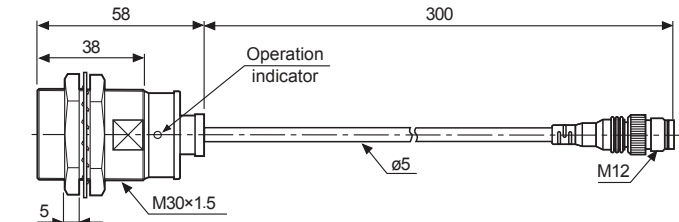



### ● PRWT30-15D□(-I)



### ● PRW30-15D□

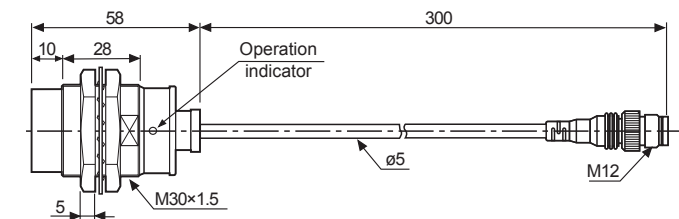

### ● PRWL08-1.5D□

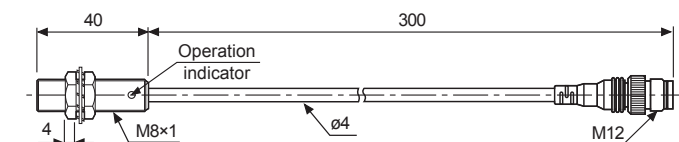



# Cylindrical Cable Connector type




## ■ Dimensions

(unit: mm)




### ● PRWL08-2D

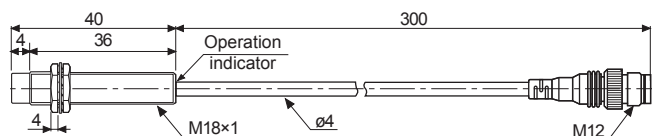

### ● PRWL08-5D

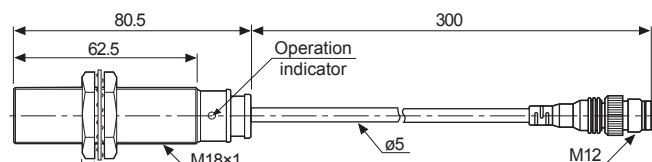




### ● PRWL18-8D

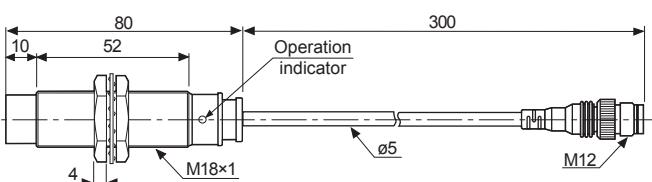




### ● PRWL08-5A

### ● PRWL18-8A

### ● PRWL30-10D

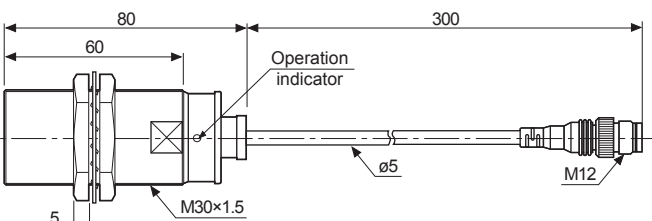



### ● PRWL30-15D

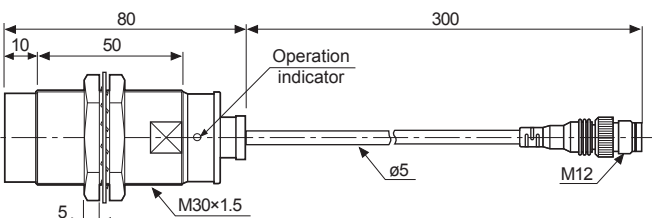


### ● PRWL30-10A

### ● PRWL30-15A




### ● PRW12-2A

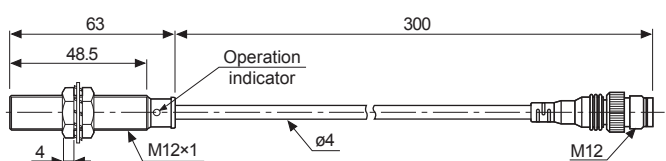




### ● PRW12-4A

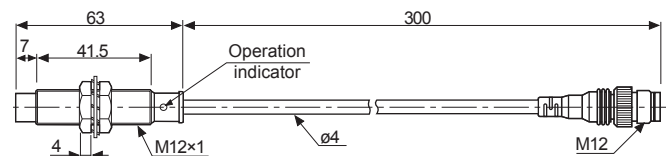

### ● PRW18-5A

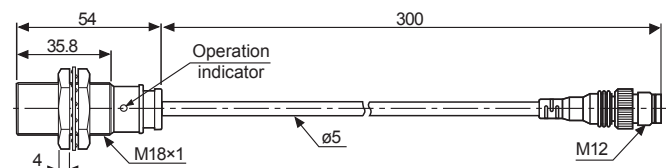

### ● PRW18-8A

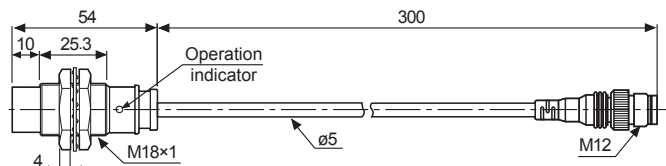

(A) Photo electric sensor

(B) Fiber optic sensor

(C) Door/Area sensor

(D) Proximity sensor

(E) Pressure sensor

(F) Rotary encoder

(G) Connector/Socket

(H) Temp. controller

(I) SSR/Power controller

(J) Counter

(K) Timer

(L) Panel meter

(M) Tacho/Speed/ Pulse meter

(N) Display unit

(O) Sensor controller

(P) Switching power supply

(Q) Stepping motor& Driver&Controller

(R) Graphic/Logic panel

(S) Field network device

(T) Software




(U) Other

# PRW Series




## ■ Dimensions

(unit:mm)

### ● PRW30-10A

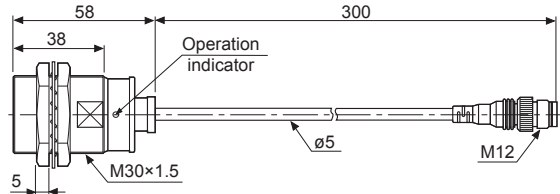


### ● PRW30-15A

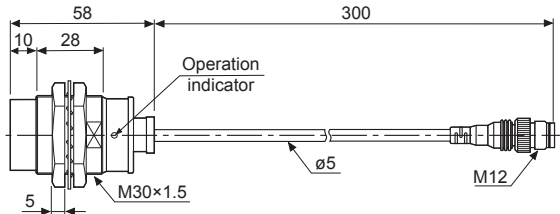


## ■ Control output diagram



### ◎ DC 2-wire type

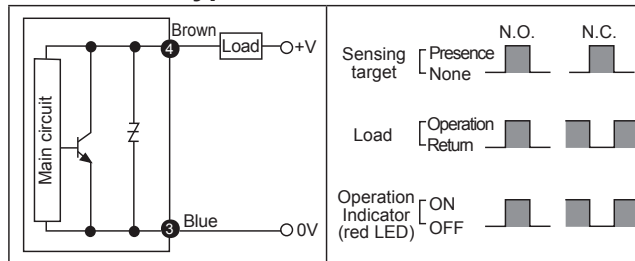

### ◎ DC 3-wire type

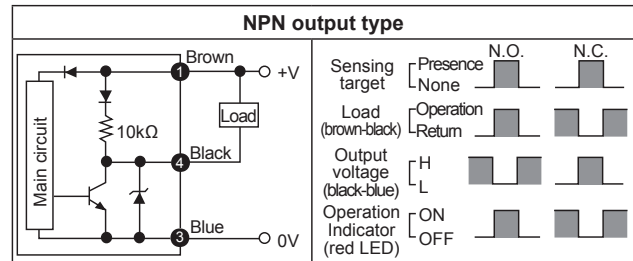


### ◎ AC 2-wire type

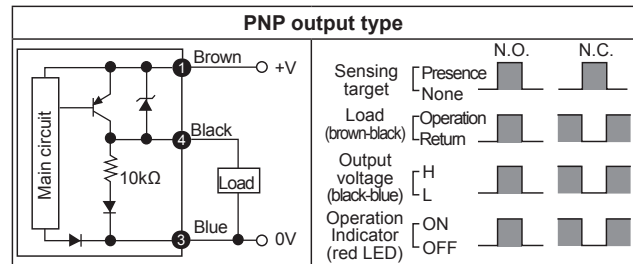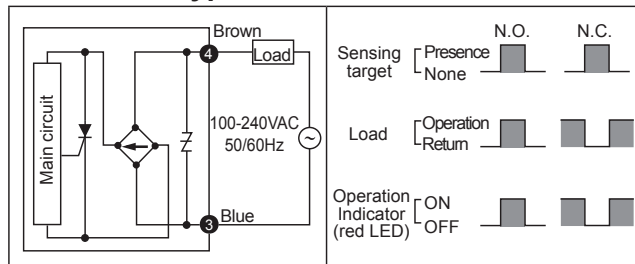

※ The number in a circle is pin no. of connector.

## ■ Wiring diagram


### ◎ DC 2-wire type(Standard type)

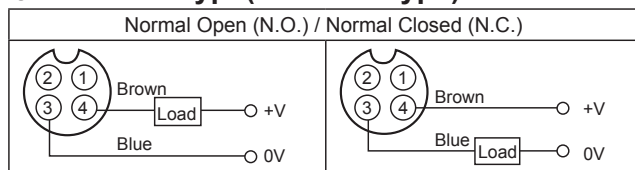

※ Pin ①, ② are not used terminals.

※ When using DC 3-wire type of connector cable, black (12-24VDC) and blue(0V) cables can be used.

### ◎ DC 2-wire type(IEC standard type)

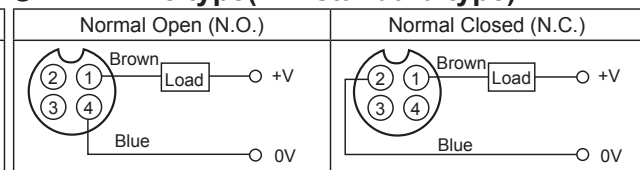


※ ②, ③ of N.O. type and ③, ④ of N.C. type are not used terminals.

※ The type, pin arrangement of connector based upon IEC standard is being developed.

※ Please put "I" behind of standard type for purchasing IEC standard product. Ex) PRWT12-4DO-I

※ Please put "I" behind of model name for selecting proximity sensor by IEC standard. Ex) CID2-2-I, CLD2-2-I

### ◎ DC 3-wire type

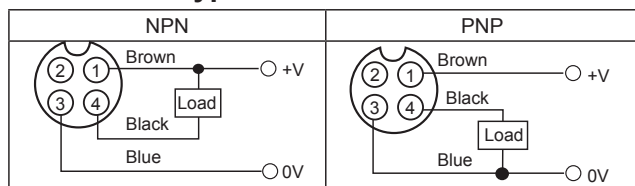


※ Please fasten the cleat of connector not to shown the thread. (0.39 to 0.49NUM)

※ Please fasten the vibration part with Teflon tape.

※ Refer to the G-5 for IEC standard connector cables and specifications.

### ◎ AC 3-wire type

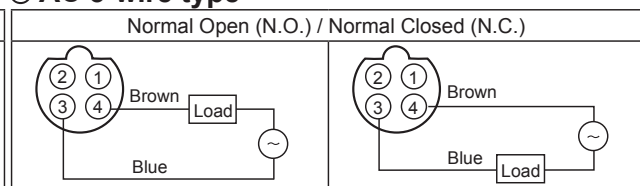


※ In case of AC switching type, ② and ③, ① and ④ are connected to each other inside.


# Cylindrical Cable Connector type

## ■ Proper usage


### ◎ Load connections

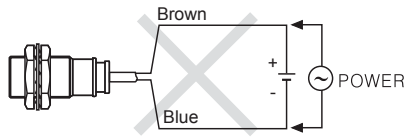

< DC 2-wire type & AC 2-wire type >

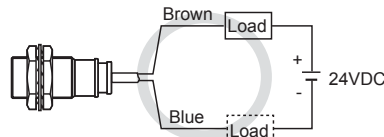

< DC 2-wire type >

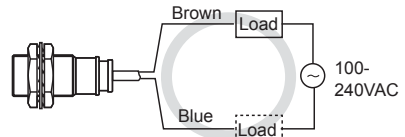


< DC 2-wire type >

When using DC or AC 2-wire type proximity sensor, the load must be connected otherwise internal components may be damaged. The load can be connected to either wire.

### ◎ In case of the load current is small

#### ● AC 2-wire type

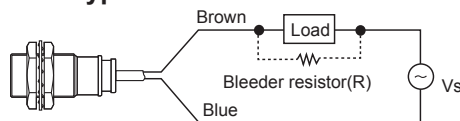

110VAC : Over 20kΩ 3W  
220VAC : Over 39kΩ 10W

It may cause return failure of load by residual voltage.

If the load current is under 5mA, please make sure the residual voltage is less than the return voltage of the load by connecting a bleeder resistor in parallel with the load as shown in the diagram.

$$R = \frac{V_s}{I} (\Omega)$$

$$P = \frac{V_s^2}{R} (W)$$

[ I: Action current of load, R: Bleeder resistance, P: Permissible power]  
Please make the current on proximity sensor smaller than the return current of load by connecting a bleeder resistor in parallel.


※ W value of Bleeder resistor should be bigger for proper heat dissipation.

$$R = \frac{V_s}{I_o - I_{off}} (\Omega)$$

$$P = \frac{V_s^2}{R} (W)$$


[ Vs : Power supply, I<sub>o</sub> : Min. action current of proximity sensor  
I<sub>off</sub> : Return current of load, P : Number of Bleeder resistance watt ]

#### ● DC 2-wire type

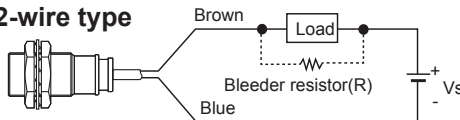


### ◎ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to provide a minimum distance between the two sensors as below chart indicates.

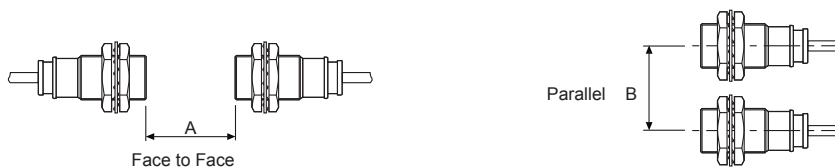

When sensors are mounted on metallic panel, it must be prevented sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

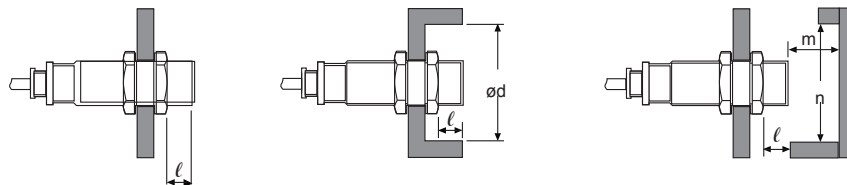

(unit: mm)

Model	PRW08-1.5D	PRW08-2D	PRWT12-2D	PRWT12-4D	PRWT18-5D	PRWT18-8D	PRWT30-10D	PRWT30-15D
Item	PRWT08-1.5D	PRWT08-2D	PRWT12-2A	PRWT12-4A	PRW(L)18-5D	PRW(L)18-8D	PRW(L)30-10D	PRW(L)30-15D
Item	PRWL08-1.5D	PRWL08-2D	PRWL12-2A	PRWL12-4A	PRW(L)18-5A	PRW(L)18-8A	PRW(L)30-10A	PRW(L)30-15A
A	9	12	12	24	30	48	60	90
B	16	24	24	36	36	54	60	90
ℓ	0	8	0	11	0	14	0	15
ød	8	24	12	36	18	54	30	90
m	4.5	6	6	12	15	24	30	45
n	12	24	18	36	27	54	45	90

(A) Photo electric sensor

(B) Fiber optic sensor

(C) Door/Area sensor

(D) Proximity sensor

(E) Pressure sensor

(F) Rotary encoder

(G) Connector/Socket

(H) Temp. controller

(I) SSR/ Power controller

(J) Counter

(K) Timer

(L) Panel meter

(M) Tacho/ Speed/ Pulse meter

(N) Display unit

(O) Sensor controller

(P) Switching power supply

(Q) Stepping motor& Driver&Controller

(R) Graphic/ Logic panel

(S) Field network device

(T) Software

(U) Other