


MVSA-260 series

SOLENOID VALVE

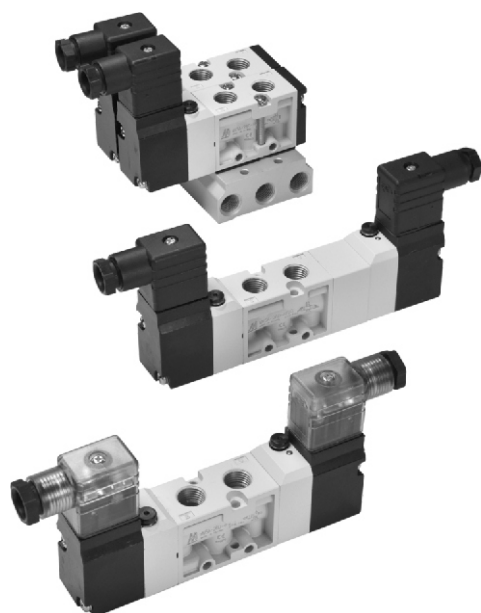


Specification:

Model	4E1	4E2	4E2C.P.R.
Bore No.	8A		
Port size	PT 1/4		
No. of port	5		
No. of position	2		3
Medium	Air		
Operating pressure range	2~7 kgf/cm ²		3~7 kgf/cm ²
Proof pressure	10 kgf/cm ²		
Effective orifice	18 mm ²		16 mm ²
Response time	40 ms		
Ambient temperature	-5~+50°C (No freezing)		
Voltage	AC110V, 220V (50/60)Hz, DC24V		
Power consumption	AC=3.5VA, DC=3.5W		
Available voltage range	± 10%		
Insulation class	B class		
Weight	308 g	475 g	592 g


Order example of valve:

MVSA – 260 – 4E2C – AC110 – L – BSP

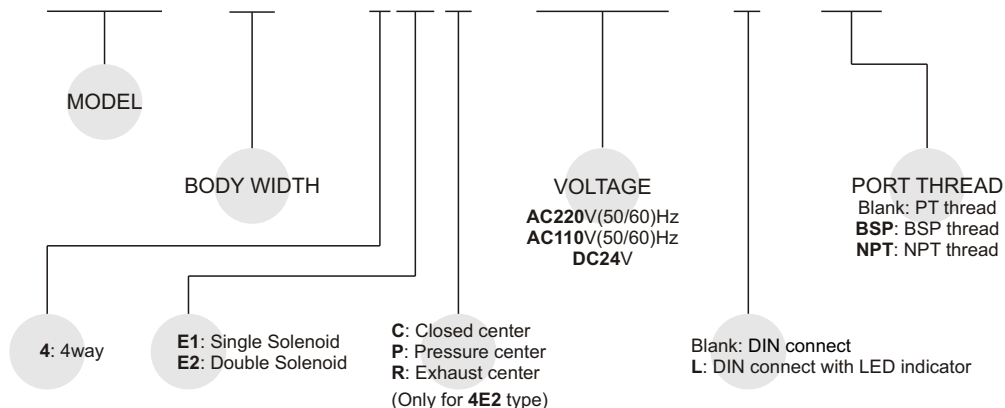

Order example of manifold:

MVSA – 260 – 5B3 – BSP

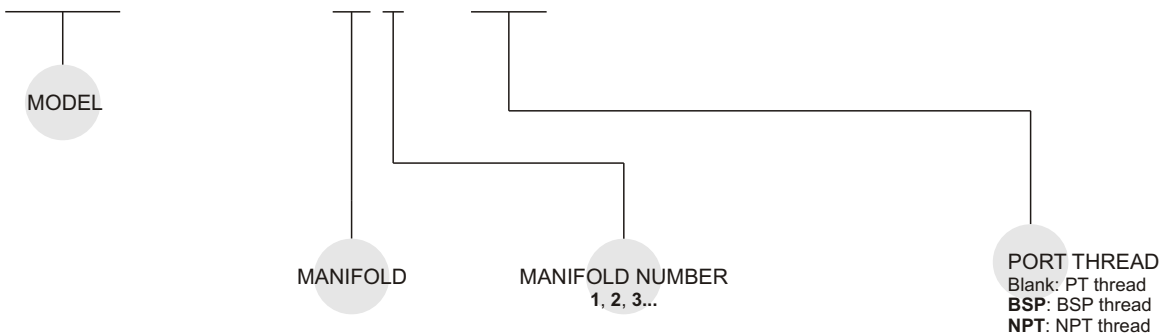


MVSA-260 Dimensions


SOLENOID VALVE



MVSA-260-4E1

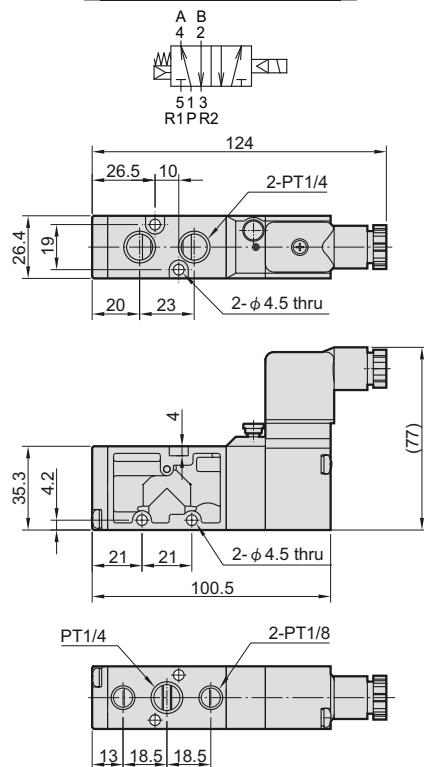

MVSA-260-4E2

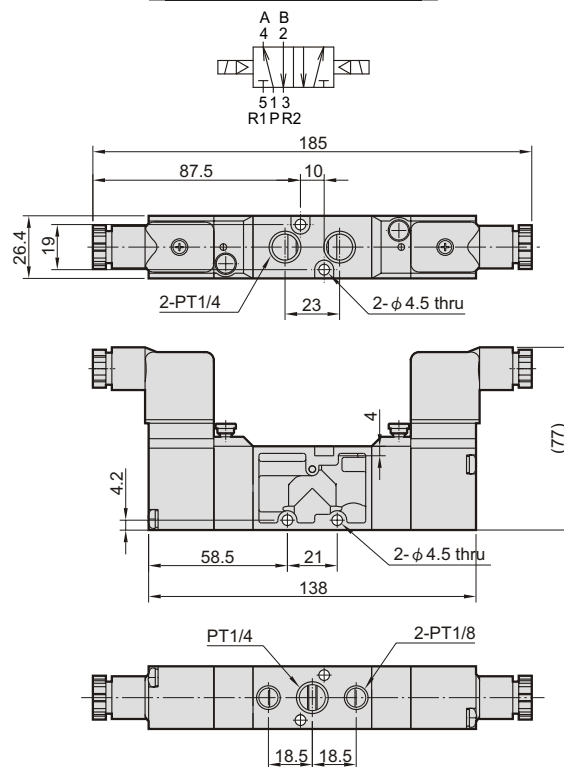


MVSA-260-4E2C.P.R


MVSA-260-4E2C

MVSA-260-4E2P

MVSA-260-4E2R

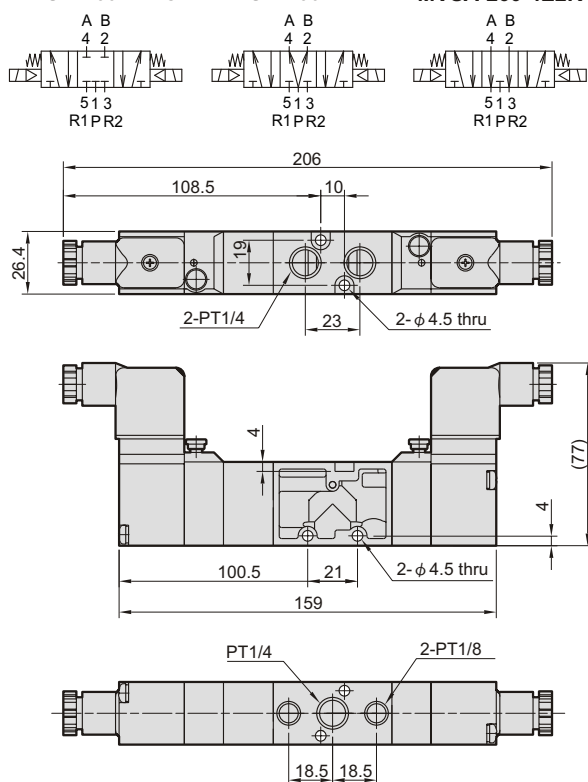

Flow features:


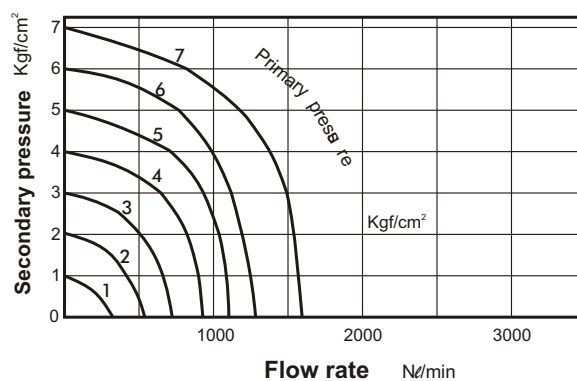


MVSA-260 Manifold

SOLENOID VALVE



MVSA-260-5B*

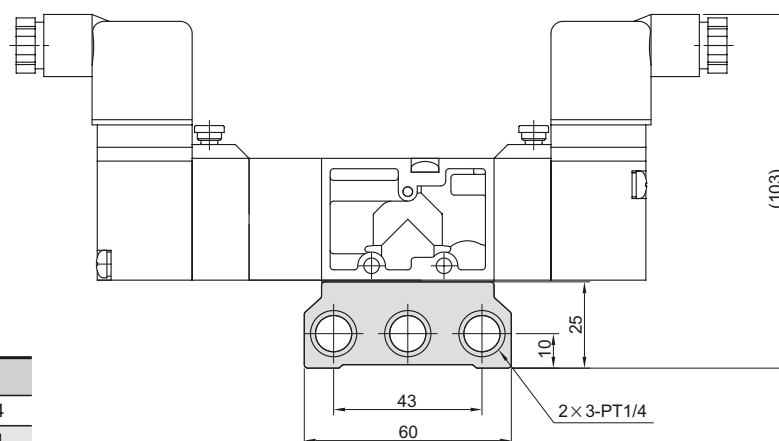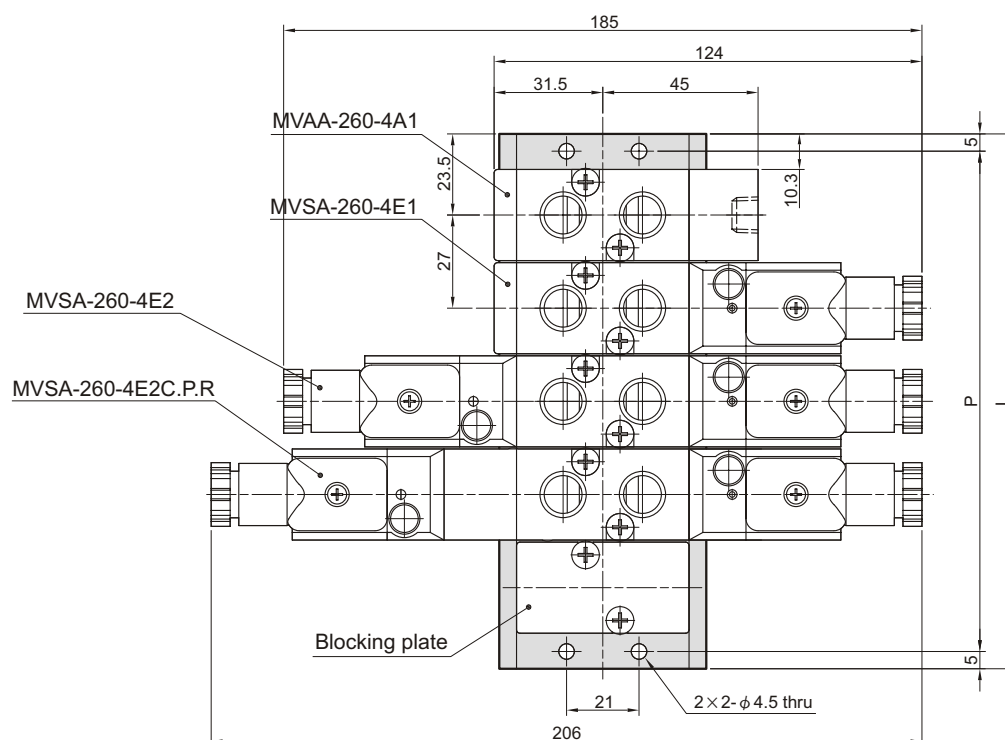

No. of stations	P	L
2	64	74
3	91	101
4	118	128
5	145	155
6	172	182
7	199	209
8	226	236
9	253	263
10	280	290