


MVSE-510 series

SOLENOID VALVE

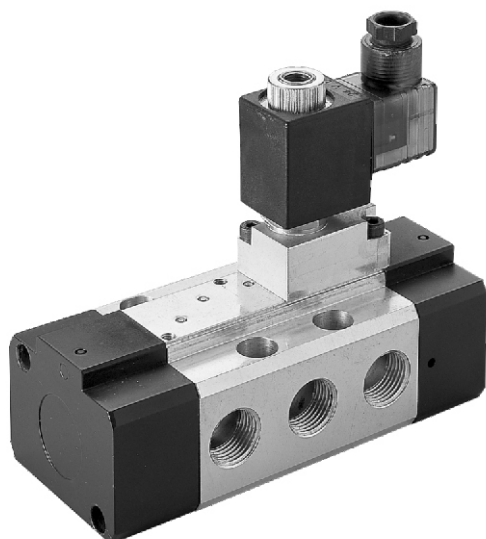

Specification:

Model	4E1	4E2
Bore No.	15A	
Port size	PT 1/2	
No. of port	5	
No. of position	2	
Medium	Air	
Operating pressure range	2~7 kgf/cm ²	
Proof pressure	10 kgf/cm ²	
Effective orifice	65 mm ²	
Response time	60 ms	
Ambient temperature	- 5~ + 50℃ (No freezing)	
Voltage	AC110V, AC220V (50/60)Hz, DC24V	
Power consumption	AC=13/11VA, DC=10W	
Available voltage range	± 10%	
Insulation class	H class	
Weight	1523 g	1808 g

Order example of valve:

MVSE — 510 — 4E2 — AC110 — L — BSP

MODEL

BODY WIDTH

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V


Blank: DIN connector
L: DIN connector with LED indicator

PORT THREAD
Blank: PT thread
BSP: BSP thread
NPT: NPT thread

4: 4way

E1: Single Solenoid
E2: Double Solenoid

Flow features:




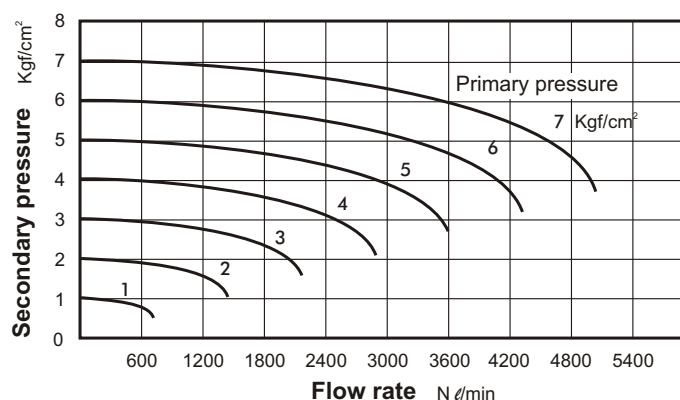


MVSE-510 Dimensions

SOLENOID VALVE



MVSE-510-4E1

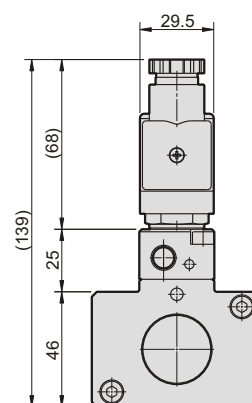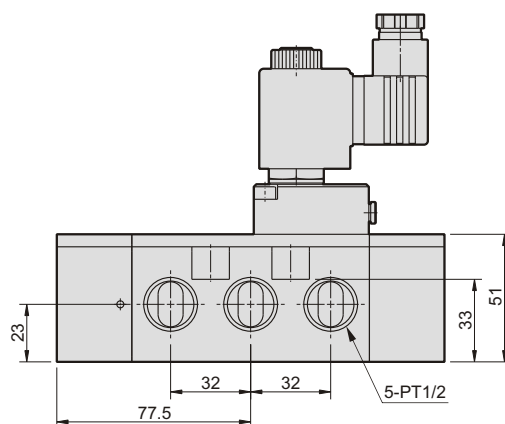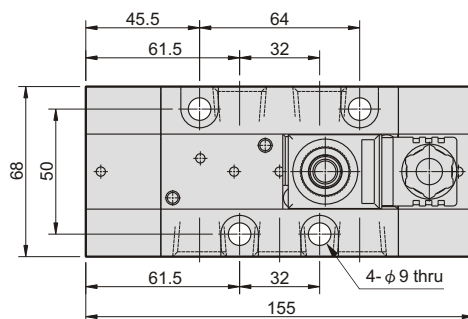

MVSE-510-4E2

