


MVAA-460 series

PILOT VALVE

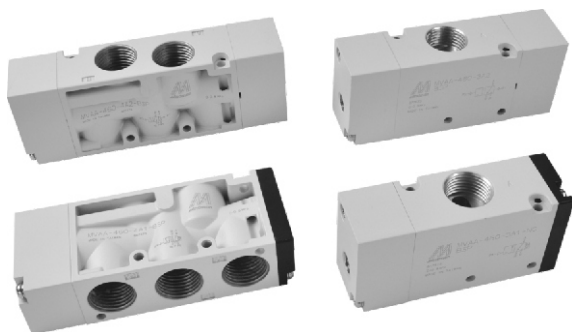

Specification:

Model	MVAA-460-3A1,A2	MVAA-460-4A1,A2
Bore No.	15A	
Port size	G 1/2	
No. of port	3	5
Medium	Air	
Operating pressure range	0~8 kgf/cm ²	
Proof pressure	10 kgf/cm ²	
Effective orifice	50 mm ²	
Pilot pressure range	2~7 kgf/cm ²	
Ambient temperature	-5~+60℃ (No freezing)	
Weight	300 g	326 g 275 g 338 g

Order example:

MVAA — 460 — 4A2 — NC — PT

MODEL

BODY WIDTH


3: 3way
4: 4way

A1: Single pilot
A2: Double pilot

NC: Normally closed
NO: Normally open
(Only for 3A1 type)

PORT THREAD
Blank: G thread
PT: PT thread
NPT: NPT thread

Flow features:




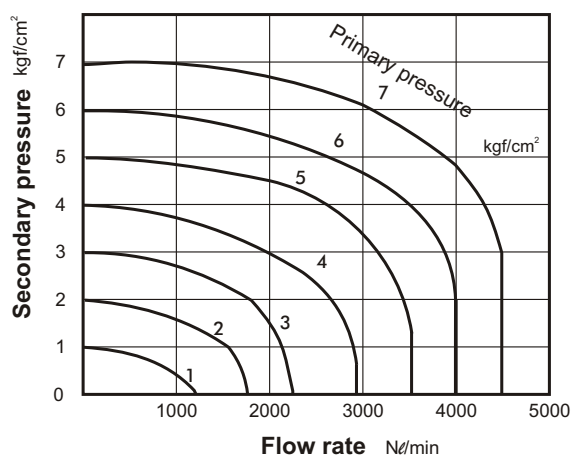


MVAA-460 Dimensions





PILOT VALVE







MVAA-460-4A1

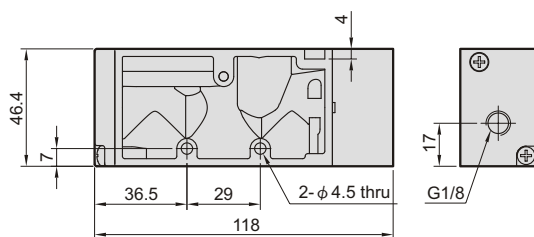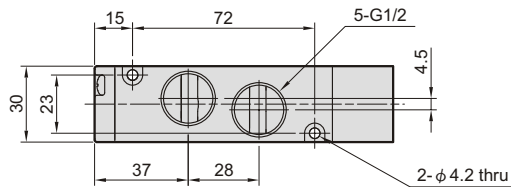

MVAA-460-4A2

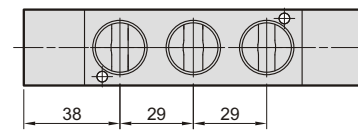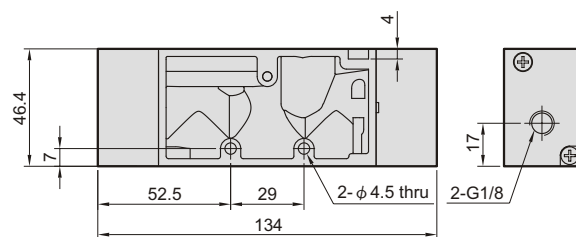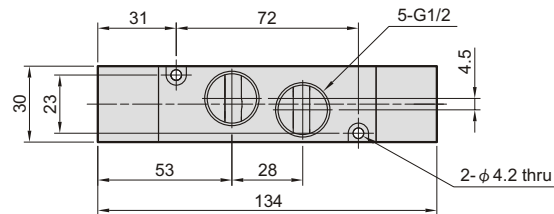

MVAA-460-3A1-NC/NO

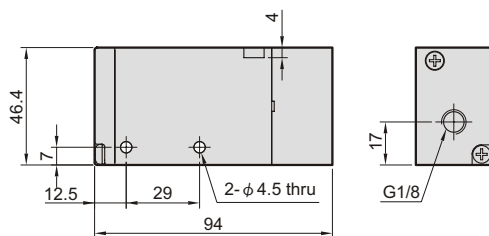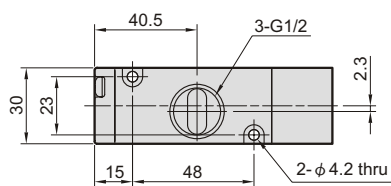

MVAA-460-3A2

