


# MBS series

## 2/2 WAY N.C. SOLENOID VALVE



Available fluid: Air, gas, water, vacuum, oil etc.

### Specification :

- IP65 waterproof coil
- Continuous cycle, 100% ED
- Ex coil is EExm II T4 or EEx ia II C T6 PTB approval.
- Ambient temp.: -15 ~ 50 °C
- Voltage tolerance:  $\pm 8\%$
- Installing position is free. (You'd better put the coil upright.)

### Power consumption:

| Coil power     | 2       | 3   | 2E  |
|----------------|---------|-----|-----|
| AC 50/60Hz(VA) | 8.5/6.9 | 8/6 | 4.8 |
| DC(W)          | 5.1     | 6.8 | 5.2 |

### Dimensions:

| Model          | MBS  |      |
|----------------|------|------|
| Code           | 03   | 06   |
| Dimension (mm) |      |      |
| D              | 50   | 50   |
| H              | 57   | 61   |
| H'             | 51   | 51   |
| L              | □22  | 33   |
| M              | 15   | 11.2 |
| W              | 23   |      |
| N.W.(Kg)       | 0.15 |      |

### Order example:

**MBS-03-2-N-2-D-AC110**

MODEL

CODE  
03: 1/8  
06: 1/4

FIG.  
1, 2, 3, 4, 5



SEAL MAT'L  
N: NBR  
J: EPDM  
V: VITON  
T: TEFLON

COIL  
2: #2  
3: Bigger  
2E: Explosion-Proof (※)

PLUG  
□: DIN  
D: LED  
G: 1/2" NPT  
K: Special  
Y: 2 wires

VOLTAGE  
AC220V(50/60)Hz  
AC110V(50/60)Hz  
DC24V

(※) Explosion-Proof (2E) coil with LED (D) plug is not applicable.

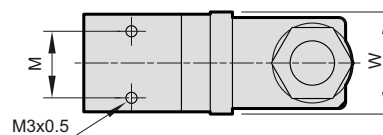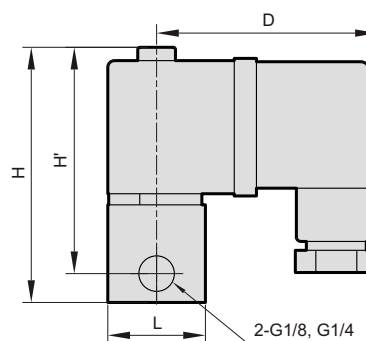

Model **MBS**: Brass body, mini 2/2 way N.C.

| Code<br>(PIPE)<br>G | Fig.<br>no. | Mat'l |      | Coil                   | Orifice<br>mm | Temp. °C |     |   |   |           |     |   |   | Max. O.P.D. bar (Min. 0 bar) |    |        |    |         |      | Cv               | VAC.<br>torr |
|---------------------|-------------|-------|------|------------------------|---------------|----------|-----|---|---|-----------|-----|---|---|------------------------------|----|--------|----|---------|------|------------------|--------------|
|                     |             | Seal  | Body |                        |               | Coil 2   |     |   |   | Coil 3/2E |     |   |   | Coil 2                       |    | Coil 3 |    | Coil 2E |      |                  |              |
|                     |             |       |      |                        |               | N        | J   | V | T | N         | J   | V | T | AC                           | DC | AC     | DC | AC      | DC   |                  |              |
| 03(1/8)<br>06(1/4)  | 1           | N     | C    | 2<br>、<br>3<br>、<br>2E | 1.0           |          |     |   |   |           |     |   |   | 30                           | 20 | 40     | 30 | 20      | 0.03 | 10 <sup>-3</sup> |              |
|                     | 2           | J     |      |                        | 1.2           | -5       | -10 |   |   | -5        | -10 |   |   | 24                           | 16 | 35     | 24 | 16      | 0.05 |                  |              |
|                     | 3           | V     |      |                        | 1.6           | 80       | 90  |   |   | 80        | 120 |   |   | 16                           | 12 | 30     | 12 | 10      | 0.09 |                  |              |
|                     | 4           | T     |      |                        | 2.0           |          |     |   |   |           |     |   |   | 13                           | 10 | 25     | 10 | 7       | 0.14 | 10 <sup>-2</sup> |              |
|                     | 5           |       |      |                        | 2.4           |          |     |   |   |           |     |   |   | 10                           | 7  | 20     | 7  | 5       | 0.18 |                  |              |