MED series

2/2 WAY SMALL SIZE N.C. DIAPHRAGM SERIES **SOLENOID VALVE**

mindman

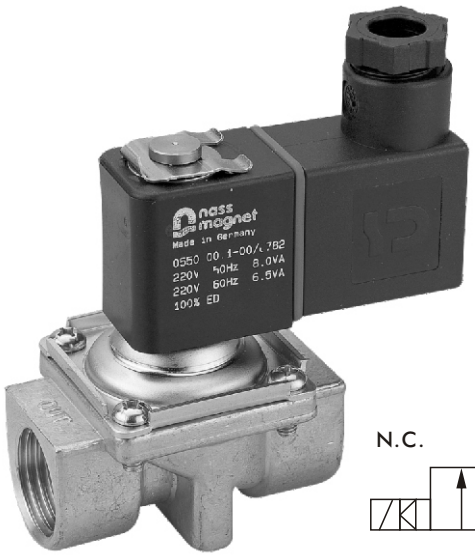



Specification :

- If the working pressure is 5 bar up for air, the operating cycle cannot 10 times /min. over.

Power consumption:

Coil power	2	3
AC(VA)	8.5/6.9	-
DC(W)	6.0	6.8

Dimensions:

Model	MED			
Code / Dimension (mm)	08	09	10	15
D	50.0		50.0	
L	41.0		56.0	
H	70.0		77.0	
M	17.0		24.0	
W	30.0		38.0	
N.W.(Kg)	0.2		0.3	

Order example:

MED – 10 – N – 2 – □ – AC110

- MODEL
- CODE
  - **08**: 1/4
  - **09**: 3/8
  - **10**: 3/8
  - **15**: 1/2
- SEAL MAT'L
  - **N**: NBR
- COIL
  - **2**: #2
  - **3**: Bigger
  - **2E**: Explosion-Proof (※)
- PLUG
  - □: DIN
  - **D**: LED
  - **G**: 1/2" NPT
  - **Y**: 2 wires
  - **O**: None
- VOLTAGE
  - **AC220**V(50/60)Hz
  - **AC110**V(50/60)Hz
  - **DC24**V

(※) Explosion-Proof (**2E**) coil with LED (**D**) plug is not applicable.

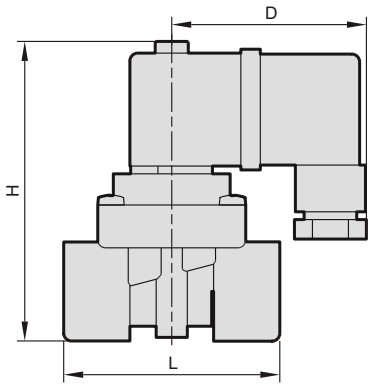

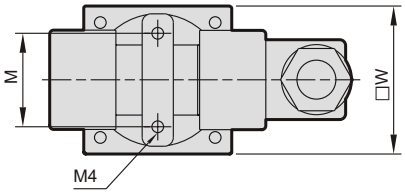

Specification:

Model **MED**: Forged brass body, pressure forming S.S. plate, for water. air

PIPE G	Code	Seal mat'l	Coil	Orifice mm	Temp. ℃		Working press. (0.3~ bar)								CV
							Coil 2				Coil 3				
					Coil 2	Coil 3	AC		DC		AC		DC		
							air	water	air	water	air	water	air	water	
1/4	08	N	2	10	-5~60	-5~80	10	10	7	2	-	-	10	5	1.3
3/8	09		3												1.6
3/8	10		2E	15											1.8
1/2	15														2.2