


Order example:

MPD-15-J-5-D-AC110

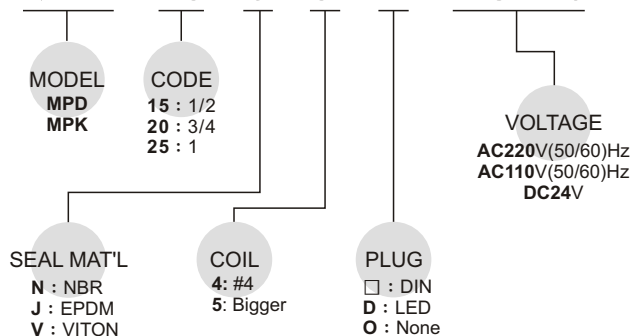

Specification :



- IP65 waterproof coil.
- Continuous cycle, 100% ED.
- Ex coil is EExm II T4 PTB approval.

Power consumption:

Coil power	4	5
AC(VA)	19.5	-
DC(W)	15.0	18.5

Dimensions:

Model	MPD / MPK		
Code Dimensi on (mm)	15	20	25
L	71	90	90
H	114	124	124
W	56	76	76
N.W.(Kg) Coil 4	0.55	0.75	0.65
N.W.(Kg) Coil 5	1.1	1.3	1.2

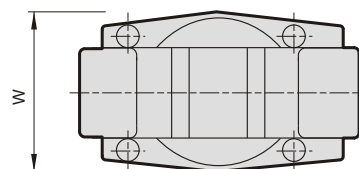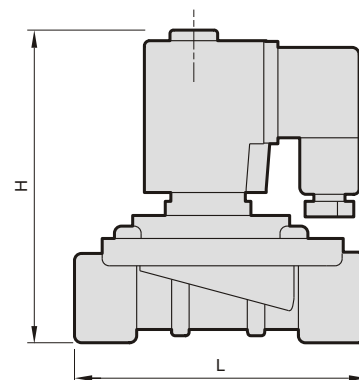

Specification:

Model MPD : PA (Nylon) body, N.C., O.P.D. 0.2 bar, for water, special fluids etc.										
Code (PIPE) G	Seal mat'l	Coil	Orifice mm	Temp.℃			Max. O.P.D. bar(0.2~ bar)			Cv
				Coil 4		Coil 5	Coil 4		Coil 5	
				N	J	V	AC	DC	DC	
15(1/2)	N・J・V	4	18	4			7	1.5	4	4
20(3/4)		5	28	7				1.0	3	9.8
25(1)		5	60	60				1.0	3	11.0

Model MPK : PA (Nylon) body, N.C., O.P.D. 0 bar, for water, special fluids etc.										
Code (PIPE) G	Seal mat'l	Coil	Orifice mm	Temp.℃			Max. O.P.D. bar(0~ bar)			Cv
				Coil 4		Coil 5	Coil 4		Coil 5	
				N	J	V	AC	DC	DC	
15(1/2)	N・J・V	4	18	4			7	0.5	2.5	4
20(3/4)		5	28	7				—		9.8
25(1)		5	60	60				—		11.0