




MSUW / MSUW-NO series Normally closed / open



SOLENOID VALVE

2-WAY normally closed / normally open solenoid valve.

Available fluid: Water, air & light oil.

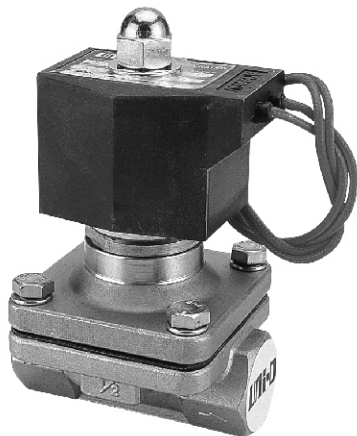

Specification :

- MSUW / MUSW-NO series is pilot diaphragm drive, normal close / normal open.
- Valve body made of investment casting S/S 316 (CF8M).
- Can be operated directly without pressure.
- Other voltage of AC/DC available when required.
- Viton(130℃), Silicon(130℃), NBR(80℃.).
- AC Voltage tolerance: $\pm 10\%$.
- DC Voltage tolerance: $\pm 1\%$.

Material:

Parts name	Material
Body	Cast 316 SS (CF8M)
Coil	Special copper wire (H)
Tube	Stainless steel
Spring	Stainless steel
Core	Stainless steel
Plug	NBR, Viton, Silicon
Diaphragm	NBR, Viton, Silicon
Ambient temperature	-5~+40℃ (No freezing)

Order example:

MSUW-20-NO-□-□-□-AC110-BSP

MODEL

PIPE SIZE

15 : 1/2"
20 : 3/4"
25 : 1"
35-1 : 1 1/4"
40-1 : 1 1/2"
50-1 : 2"

□ : Normally closed
NO : Normally open

SEAL MAT'L

□ : NBR
V : Viton
S : Silicon

FLUID

□ : Water, Air
LO : Light oil (Note, if diesel fuel or gasoline.)
G : Gas
VA : Vacuum

COIL

□ : Special copper wire
D : DIN

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V

PORT THREAD

Blank: PT thread
BSP: BSP thread
NPT: NPT thread

Caution:

- Pipes must be washed neat and clean before fitted.
- A Y-STRAINER has to be installed in the front of solenoid valve, that is best for long life.

Not for fluid of:

- Liquid when heat, solid when cool.
- Corrosive fluid.
- Viscosity over 20 cst.

	Model	DIN	Pipe size	Cv	Orifice (mm)	Fluid temp	Max. operating pressure diff. kgf/cm ²					Dimensions(mm)			Weight (kg)
							Water	Air	Light oil	Gas	Vacuum	L	H	D	
NC	MSUW-15	●	PT 1/2"	4.5	15	-5~+80℃	0~5	0~7	0~5	—	—	70	100	50	0.9
	MSUW-20	●	PT 3/4"	8.6	20	-5~+80℃	0~5	0~7	0~5	—	—	73	102	50	1.0
	MSUW-25	●	PT 1"	12	25	-5~+80℃	0~5	0~7	0~5	—	—	93	106	50	1.6
	MSUW-35-1	●	PT 1 1/4"	24	35	-5~+80℃	0~5	0~7	0~5	—	—	125	140	58	3.2
	MSUW-40-1	●	PT 1 1/2"	28	40	-5~+80℃	0~5	0~7	0~5	—	—	125	140	58	3.4
	MSUW-50-1	●	PT 2"	48	50	-5~+80℃	0~5	0~7	0~5	—	—	167	170	58	5.8
NO	MSUW-15-NO	●	PT 1/2"	4.5	15	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	70	126	50	1.0
	MSUW-20-NO	●	PT 3/4"	8.6	20	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	73	132	50	1.1
	MSUW-25-NO	●	PT 1"	12	25	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	93	139	50	1.7
	MSUW-35-1-NO	●	PT 1 1/4"	24	35	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	125	154	58	3.5
	MSUW-40-1-NO	●	PT 1 1/2"	28	40	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	125	156	58	3.7
	MSUW-50-1-NO	●	PT 2"	48	50	-5~+80℃	0~5	0~7	—	0~7	0~10 ⁻³ Torr	167	175	58	6.1

※ The pressure ratings indicated above are based on AC110V/220V. The maximum pressure may vary in case on DC/AC24V.