





How to Order

AZH AZH 07 07

1

В D S

2

- 06 - 01 06

01 4

01 (5)

O	Nozzle	diameter	mr	n
_				

05	0.5
07	0.7
10	1.0
13	1.3
15	1.5
18	1.8
20	2.0

@ Max.v	acuum pressur

S	-88kPa		
L	-48kPa		

3	(Note)SUP.	Port	size
_			

Symbol	Size	Style
06	Φ6	One-touch
08 Ф8		One-touch
10	Ф 10	One-touch
12	Ф12	One-touch
01	Rc 1/8	Screw-in
02	Rc 1/4	Screw-in
03	Rc 3/8	Screw-in

(Note)VAC. Port size

Symbol	Size	Style
06	Φ6	One-touch
10	Ф 10	One-touch
12	Ф12	One-touch
16	Ф16	One-touch
01	Rc 1/8	Screw-in
02	Rc 1/4	Screw-in
03	Rc 3/8	Screw-in
04	Rc 1/2	Screw-in

(Note)EXH. Port size

Symbol	Size	Style
06	Φ6	One-touch
08	Φ8	One-touch
10	Ф10	One-touch
12	Ф12	One-touch
16	Ф16	One-touch
01	Rc 1/8	Screw-in
02	Rc 1/4	Screw-in
03	Rc 3/8	Screw-in
04	Rc 1/2	Screw-in

Specifications

Model	Nozzle diameter		Max.vacuum pressure(kpa)		Max.vacuum flow l/min		Air consumption I/min	Connection (One-touch/Screw-in)			
	Φmm		S style	L style	S style	L style	S style/L style	SUP	VAC	EXH	
AZH05B□	0.5				5	9	13.5	Φ6/Rc1/8	Φ6/Rc1/8		
AZH07B□	0.7	Box style	000	40	12	22	23.5				
AZH10B□	1.0	(Built-in silencer)	-88	-48	24	34	46				
AZH13B□	1.3					40	75	78	Φ8/Rc1/8	B Φ10/Rc1/4	
AZH05D□	0.5				7.5	9	13.5	◆ C/D - 1/C	◆ C/D - 1/O	↑ C/D - 1/O	
AZH07D□	0.7	Body ported style		4.0	12	22	23.5	Φ6/Rc1/8	Φ6/Rc1/8	Φ6/Rc1/8	
AZH10D□	1.0	(without silencer)	ut silencer)	-88 -48	24	34	46	Φ6/Rc1/8	Φ6/Rc1/8	Φ8/Rc1/8	
AZH13D□	1.3						40	75	78	Φ8/Rc1/8	Φ10/Rc1/4
AZH15D□	1.5	Body ported style (without silencer) -88			60	80	97	Φ10/Rc1/4	+ 40/D 0/0	* 40/D - 0/0	
AZH18D□	1.8		-88 -53	-53	70	110	150	Φ 12/Rc3/8	Φ 12/Rc3/8	Φ 12/Rc3/8	
AZH20D□	2.0		(will four silencer)		85	140	185	Φ12/Rc3/8	Φ16/Rc1/2	Φ 16/Rc1/2	

ABX


AIRBEST	
Medan Germany Engineered _	
, ,	

Table 1 Combination	on of cor	nnection		
Body		SUP	VAC	EXH
B 17	1	One-touch	One-touch	
Box style (Buit-in silencer)	2	One-touch	Screw-in	
(Buit-III Silericer)	3	Screw-in	Screw-in	
	1	One-touch	One-touch	One-touch
Body ported style (without silencer)	2	One-touch	Screw-in	One-touch
(Without shericer)	3	Screw-in	Screw-in	Screw-in


able2port	size			
Model	SUP	VAC	EXH	
AZH05B				
AZH07B	Φ6/Rc1/8	Φ6/Rc1/8		
AZH10B			87-57-0	
AZH13B	Φ8/Rc1/8	Φ10/Rc1/4		
AZH05D	Φ6/Rc1/8	Ф.C/Do.1/0	Φ 6/D α 1/0	
AZH07D	Ψ6/RC1/6	Φ6/Rc1/8	Φ6/Rc1/8	
AZH10D	Φ6/Rc1/8	Φ6/Rc1/8	Φ8/Rc1/8	
AZH13D	Φ8/Rc1/8	Φ10/Rc1/4	Φ 10/Rc1/4	
AZH15D	Φ 10/Rc1/4	Ф 10/Po2/9	★10/D-0/	
AZH18D	Φ 12/Rc3/8	Φ 12/Rc3/8	Φ 12/Rc3/8	
AZH20D	Φ 12/Rc3/8	Φ16/Rc1/2	Φ16/Rc1/2	

Dimensions (mm)

Box style (Buit-in silencer)

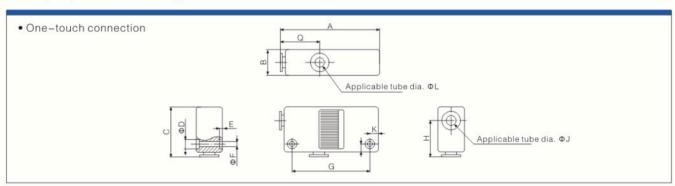


100	19	20	67	9		W.	80	40	0.00	8 9	St.,	6
Model	А	В	С	D	Е	F	G	Н	Q	L	K	J
AZH05B-06-06	60	16	31	5.8	2	3.2	47	22	24	6	5	6
AZH07B-06-06	60	16	31	5.8	2	3.2	47	22	24	6	5	6
AZH10B-06-06	63	18	32	5.8	2	3.2	50	23	26	6	5	6
AZH13B-08-10	78	23	38.5	7.5	3	4.2	61	27.5	28	10	7	8

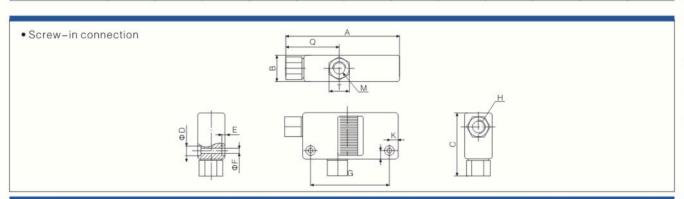


Model	А	В	С	D	Е	F	G	Н	Q	М	K	Т
AZH05B-01-01	67.5	16	38.5	5.8	2	3.2	47	Rc1/8	31.5	Rc1/8	5	12
AZH07B-01-01	67.5	16	38.5	5.8	2	3.2	47	Rc1/8	31.5	Rc1/8	5	12
AZH10B-01-01	70.5	18	39.5	5.8	2	3.2	50	Rc1/8	33.5	Rc1/8	5	12
AZH13B-01-02	86.5	23	50	7.5	3	4.2	61	Rc1/8	36.5	Rc1/4	7	14



Body ported style(without silencer)

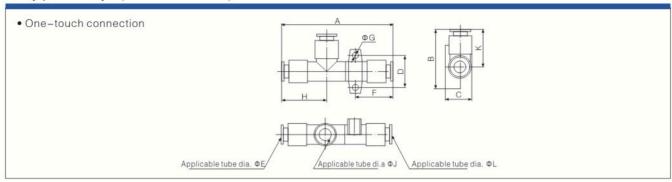

Model	А	В	С	D	Е	F	G	Н	L	K	J
AZH05D-06-06-06	58.5	34	14.2	17	6	21	3.2	24	6	22	6
AZH07D-06-06-06	61	34	14.2	17	6	22	3.2	24	6	22	6
AZH10D S -06-06-08	66 70	37	17.2	20	6	24.5	4.2	26	8	23	6
AZH13D ^S -08-10-10	74 79.5	42.5	20	22	8	27	4.2	28	10	27.5	10
AZH15D-10-12-12	93.3	47	22.5	27	10	32.8	4.2	31.5	12	29.5	12
AZH18D-12-12-12	114	41	21	10	12	50	3.5	35.5	12	30.5	12
AZH20D-12-16-16	124.6	46	27	12	12	54.3	3.5	38.5	16	32.7	16

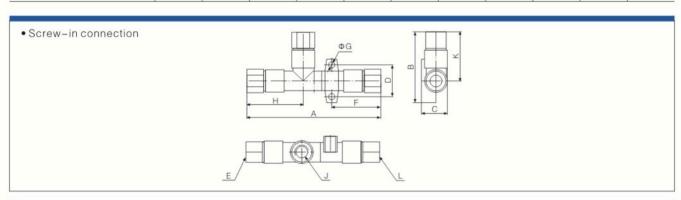

Model	А	В	С	D	E	F	G	Н	L	K	J
AZH05D-01-01-01	73.5	41.5	14.2	17	Rc1/8	28.5	3.2	31.5	Rc1/8	22	Rc1/8
AZH07D-01-01-01	76	41.5	14.2	17	Rc1/8	29.5	3.2	31.5	Rc1/8	22	Rc1/8
AZH10D ^S -01-01-01	82 86	44.5	17.2	20	Rc1/8	33	4.2	33.5	Rc1/8	23	Rc1/8
AZH13D ^S -01-02-02	94.5 99.5	54	20	22	Rc1/8	38.5	4.2	36.5	Rc1/4	27.5	Rc1/
AZH15D-02-03-03	116.5	58.5	22.5	27	Rc1/4	44.5	4.2	43	Rc3/8	29.5	Rc3/
AZH18D-03-03-03	133	52.5	21	10	Rc3/8	57.5	3.5	47	Rc3/8	30.5	Rc3/
AZH20D-03-04-04	151	61	27	12	Rc3/8	69.3	3.5	50	Rc1/2	32.7	Rc1




Vacuum flow (I/min) at different vacuum levels(-kPa)


Model –kPa	Air supply pressure	Air consumption	0	10	20	30	40	50	60	70	80	Max.vacuum level
AZH05S		13.5 l/min	5	4.5	4.1	3.8	3.3	2.3	1.6	0.9	0.3	
AZH07S	4.5 bar	23.5 l/min	12	11	10	9	8	7	5.5	2.1	0.8	
AZH10S		46 l/min	24	23	20.5	17.5	13	11.5	9.5	7	2.5	
AZH13S		78 l/min	40	35	32.5	28	23	19.5	13	9	4.5	-88kPa
AZH15S		97 l/min	60	52.5	45.5	38	28.5	20.5	15.5	11.5	5	
AZH18S		150 l/min	70	62	52	45	38	26	22	16.5	8.5	
AZH20S		185 l/min	85	76	67	58	47.5	38	33.5	19	12	

Evacuation time (s/I) to reach different vacuum levels (-kPa)


Model -kPa	Air supply pressure	Air consumption	10	20	30	40	50	60	70	Max.vacuum level
AZH05S	4.5 bar	13.5 l/min	0.89	1.7	3.2	5	7.8	12	19	
AZH07S		23.5 l/min	0.37	1	1.9	3	5.4	6.7	15	
AZH10S		46 I/min	0.25	0.6	1.25	2	2.9	4.2	6.5	
AZH13S		78 I/min	0.1	0.27	0.53	1	1.75	4.6	7.3	-88kPa
AZH15S		97 I/min	0.04	0.21	0.35	0.63	1.23	4.1	7.3	
AZH18S		150 l/min	0.02	0.15	0.29	0.46	0.78	1.38	3.51	
AZH20S		185 l/min	0.02	0.12	0.21	0.34	0.55	0.85	1.58	


· AZH05S





· AZH07S





ABX

ABM/ABX Combined type

AM

AL

AH

AM Combined type

AL Combined type

AH Combined type

AZL112

AZL212

ACP


ACPF

ACV


AZU




· AZH10S




· AZH13S





· AZH15S





· AZH18S













ABM



· AZH20S





Vacuum flow (I/min) at different vacuum levels (-kPa)

Model -kPa	Air supply pressure	Air consumption	0	10	20	30	40	45	Max.vacuum level
AZH05L		13.5 l/min	9	8	7	6	3	1.9	
AZH07L	4.5 bar	23.5 I/min	22	21	20.5	15.5	10.5	6.8	-48kPa
AZH10L		46 I/min	34	32	26	19	12	8	-40KPa
AZH13L		78 l/min	75	72	65	43	19	9	

Model – kPa	Air supply pressure	Air consumption	0	10	20	30	40	50	Max.vacuum level
AZH15L		97 I/min	80	72	60	45	36.5	16	
AZH18L	4.5 bar	150 l/min	110	105	95	80	55	30	-53kPa
AZH20L		185 l/min	140	130	120	100	80	62	


Evacuation time (s/I) to reach different vacuum levels (-kPa)

Model	Air supply pressure	Air consumption	10	20	30	40	45	Max.vacuum leve
AZH05L		13.5 l/min	0.49	1.5	2.9	5.1	7.2	
AZH07L	AZH07L AZH10L 4.5 bar AZH13L	23.5 l/min	0.28	0.75	1.5	2.5	3.5	40LD-
AZH10L		46 l/min	0.14	0.4	0.81	1.4	1.8	-48kPa
AZH13L		78 l/min	0.04	0.12	0.24	0.62	2.4	


Model -kPa	Air supply pressure	Air consumption	10	20	30	40	50	Max.vacuum level
AZH15L		97 I/min	0.03	0.15	0.23	0.4	0.92	
AZH18L	4.5 bar	150 l/min	0.02	0.10	0.18	0.32	0.67	-53kPa
AZH20L		185 l/min	0.01	0.08	0.14	0.2	0.3	




· AZH05L




· AZH07L





· AZH10L





· AZH13L











ABX

ABM/ABX Combined type

AM

AL

AH

AM Combined type

AL Combined type

AH Combined type

AZL112

AZL212

ACP

ACPF


ACV

AZU


ASBP

Medan Germany Engineered

· AZH15L



· AZH18L



· AZH20L

