



MACT402 series

AIR UNITS (F.R.L.UNIT)

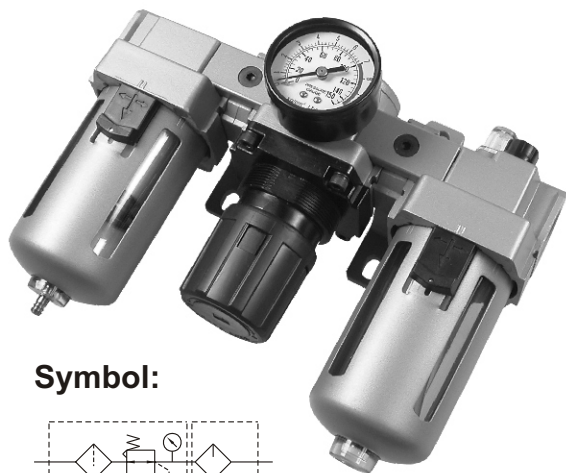

Symbol:



Specification:

Model	MACT402		
Components	MAF402, MAR402, MAL402		
Bore No.	10A	15A	20A
Port size	PT 3/8	PT 1/2	PT 3/4
Medium	Air		
Operating pressure range	0~9.9kgf/cm ² (0~0.99MPa)		
Proof pressure	15kgf/cm ² (1.5MPa)		
Regulated pressure range	0.5~8.5kgf/cm ² (0.05~0.85MPa)		
Ambient temperature	-5~+60℃ (No freezing)		
Filter element	Standard: 40 μm Option: 5, 20 μm		
Lubricating oil capacity	180 c.c		
Min. Flow for oil drip	200 ℓ/min		
Recommended lubricating oil	Turbine oil ISO-VG32		
Attachment	Pressure gauge, bracket		
Weight	2392 g		

Order example:

MACT402 – 20A – □ – □ – BSP

MODEL

BORE SIZE

10A : PT 3/8
15A : PT 1/2
20A : PT 3/4




D: auto drain valve

FILTER ELEMENT

Blank: 40 μm
5u: 5 μm
20u: 20 μm

PORT THREAD

Blank: PT thread
BSP: BSP thread
NPT: NPT thread

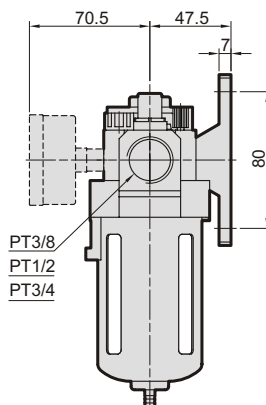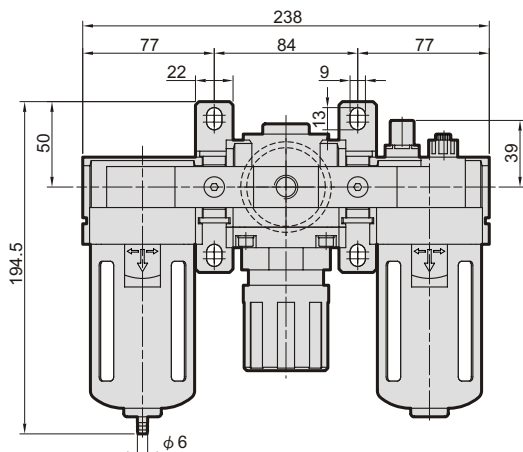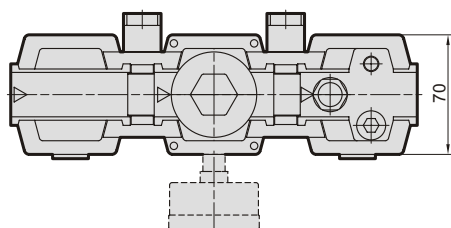

Flow feature:

