



# MACT410 series Stainless steel #316 type

AIR UNITS (F.R.L.UNIT)

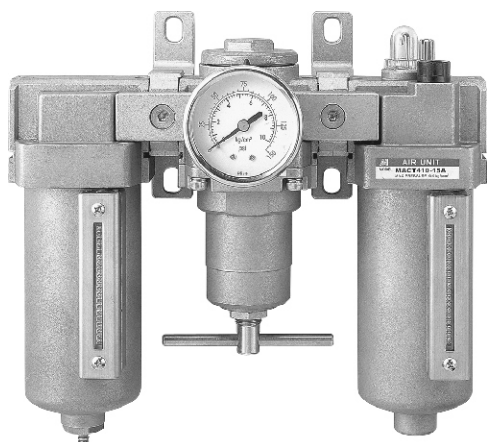

Symbol:



## Specification:

| Model                       | MACT410                                     |        |        |
|-----------------------------|---------------------------------------------|--------|--------|
| Components                  | MAF410, MAR410, MAL410                      |        |        |
| Bore No.                    | 10A                                         | 15A    | 20A    |
| Port size                   | PT 3/8                                      | PT 1/2 | PT 3/4 |
| Medium                      | Air                                         |        |        |
| Operating pressure range    | 0~9.9 kgf/cm <sup>2</sup> (0~0.99 MPa)      |        |        |
| Proof pressure              | 15 kgf/cm <sup>2</sup> (1.5 MPa)            |        |        |
| Regulated pressure range    | 0.5~8.5 kgf/cm <sup>2</sup> (0.05~0.85 MPa) |        |        |
| Ambient temperature         | -5~+60°C (No freezing)                      |        |        |
| Filter element              | Standard: 40 μm Option: 5,20 μm             |        |        |
| Lubricating oil capacity    | 130c.c                                      |        |        |
| Min. flow for oil drip      | 50 ℓ/min                                    |        |        |
| Recommended lubricating oil | Turbine oil ISO-VG32                        |        |        |
| Attachment                  | Pressure gauge, bracket                     |        |        |
| Weight                      | 5968 g                                      |        |        |

Order example:

MACT410 – 15A – □ – BSP

MODEL

BORE SIZE



10A: PT 3/8  
15A: PT 1/2  
20A: PT 3/4

FILTER ELEMENT

Blank: 40 μm  
5u: 5 μm  
20u: 20 μm

PORT THREAD

Blank: PT thread  
BSP: BSP thread  
NPT: NPT thread

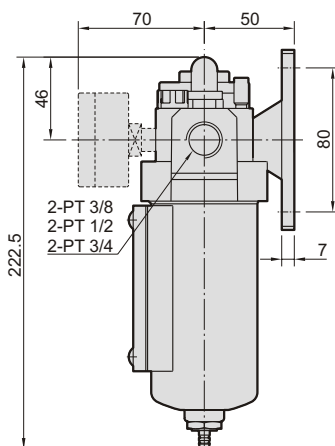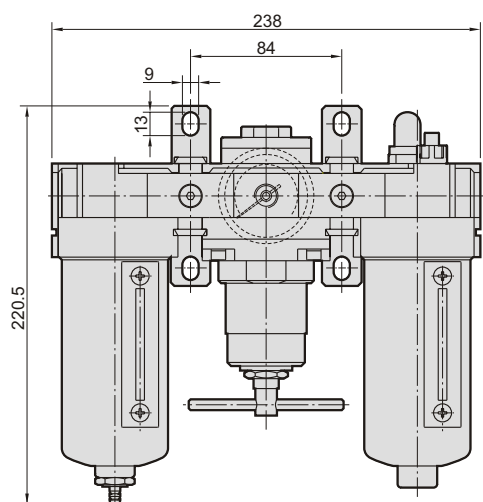

## Flow feature:

