


MVSE-600 series

SOLENOID VALVE

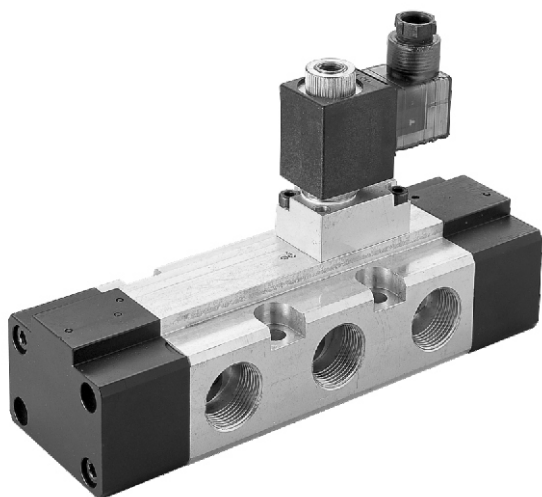

Specification:

Model	4E1	4E2
Bore No.	20A , 25A	
Port size	PT 3/4 , PT 1	
No. of port	5	
No. of position	2	
Medium	Air	
Operating pressure range	2~7 kgf/cm ²	
Proof pressure	10 kgf/cm ²	
Effective orifice	20A: 96 mm ²	
	25A: 100 mm ²	
Response time	80 ms	
Ambient temperature	- 5~+ 50℃ (No freezing)	
Voltage	AC110V, AC220V (50/60)Hz, DC24V	
Power consumption	AC=13/11VA, DC=10W	
Available voltage range	± 10%	
Insulation class	H class	
Weight	1817 g	2102 g

Order example of valve:

MVSE — 600 — 4E2 — 25A — AC110 — L — BSP

MODEL

BODY WIDTH

4: 4way

E1: Single Solenoid
E2: Double Solenoid

BORE SIZE

20A: PT 3/4
25A: PT 1

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V


Blank: DIN connector

L: DIN connector with LED indicator

PORT THREAD

Blank: PT thread
BSP: BSP thread
NPT: NPT thread

Flow features:




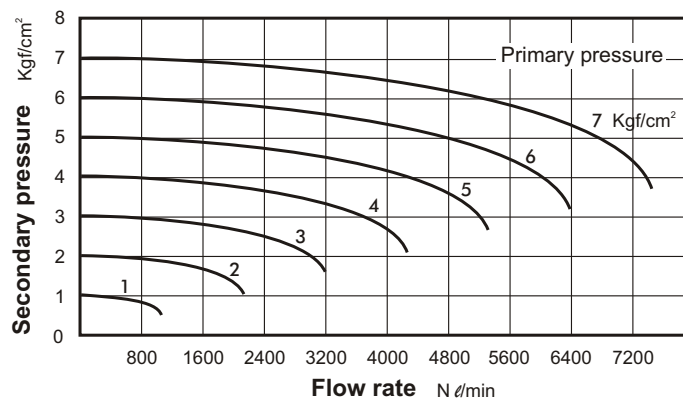


MVSE-600 Dimensions

SOLENOID VALVE



MVSE-600-4E1

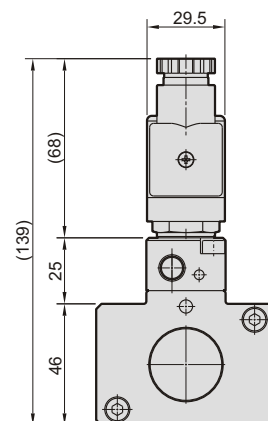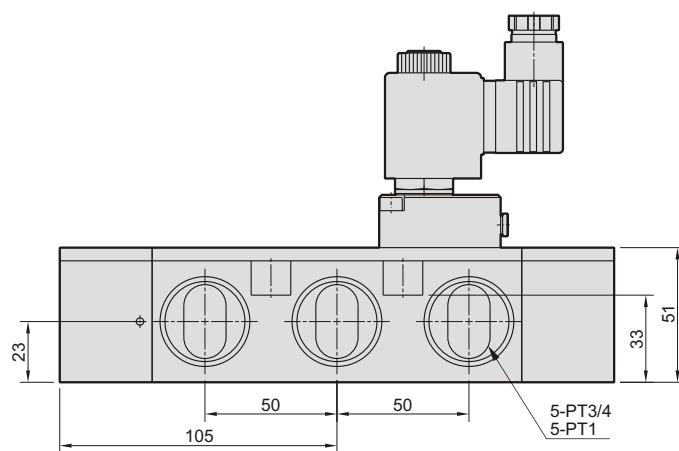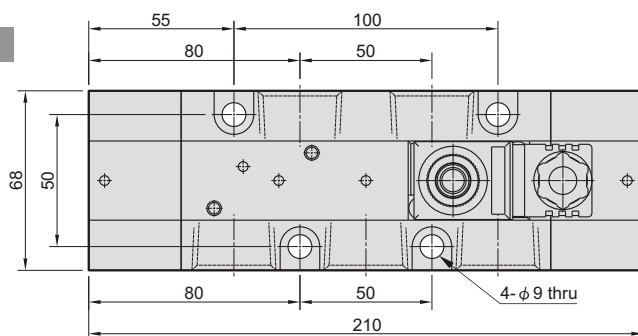

MVSE-600-4E2

