


MVMB-250 series

MECHANICAL VALVES

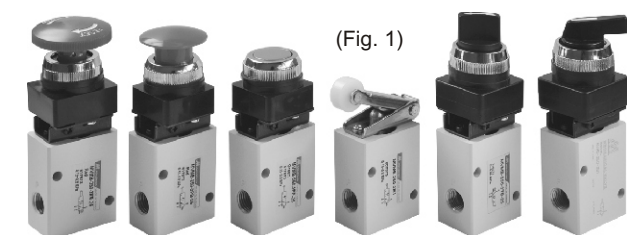

(Fig. 1)

Specification:

Model	MVMB-250
Bore No.	8A
Port size	PT 1/4
No. of port	2 or 3
No. of position	2
Medium	Air
Operating pressure range	0~9.9 kgf/cm ²
Effective orifice	18 mm ²
Ambient temperature	-5~+60℃ (No freezing)
Weight	193 g

actuator-holder



- Only show body and actuator-holder in Fig. 2
- Actuators are exchangeable with the same holder.
- Actuator set or released by one-

Order example:

MVMB - 250 - 3R1 - 25 - BSP

MODEL

BODY WIDTH

BUTTON SIZE

22: ϕ 22 (Fig. 2)

25: ϕ 25 (Fig. 1)


30: ϕ 30 (Fig. 1)

2: 2way
3: 3way



B1: body(without button)
EB: latching palm button
LB: extended twist button
TB: twist button
PB: mushroom palm button
PP: push button
R1: roller lever

PORT THREAD
Blank: PT thread
BSP: BSP thread
NPT: NPT thread

MVMB-250-3B1



MVMB-250-2B1

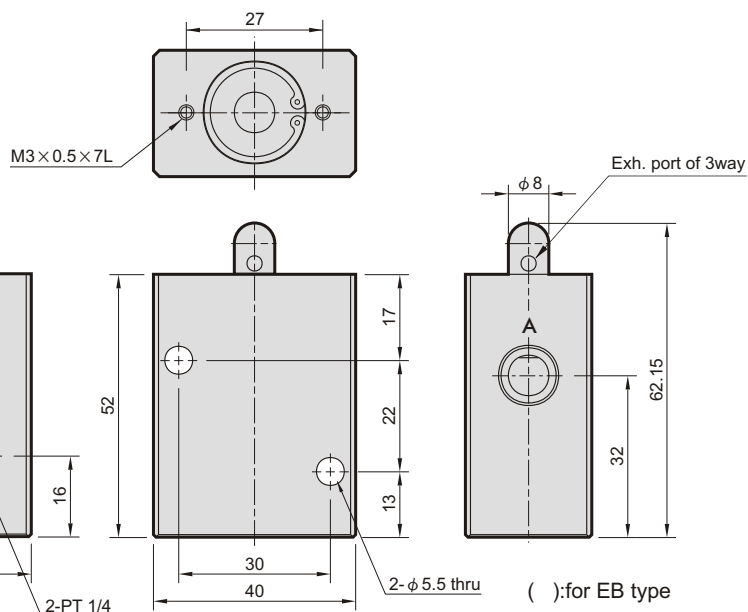



MVMB-250 Dimensions



MECHANICAL VALVES





3EB-25





2EB-25

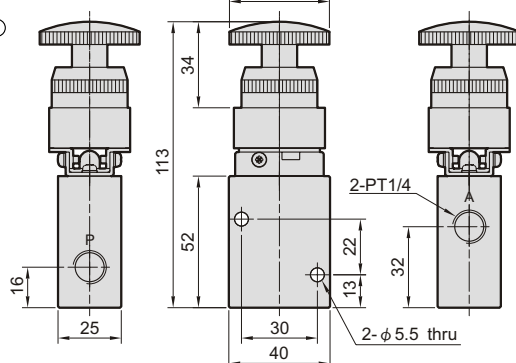



3LB-25





2LB-25

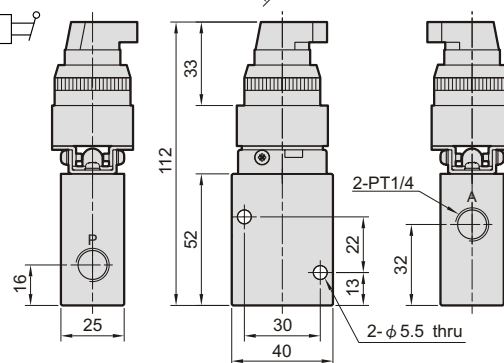



3TB-25





2TB-25

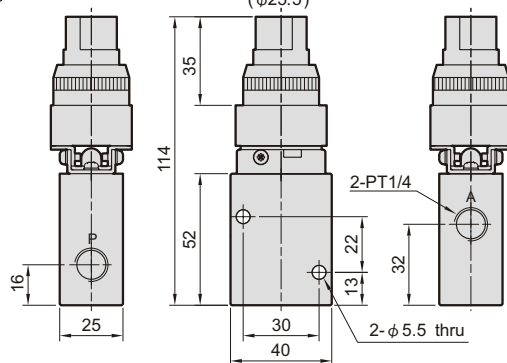



3PB-25





2PB-25

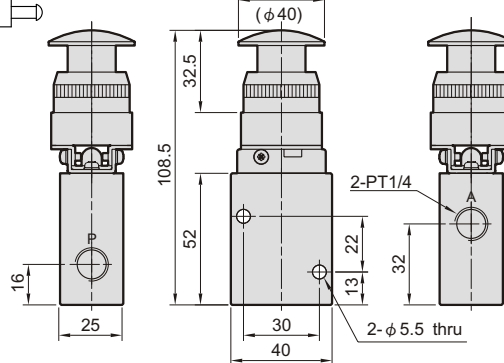

3PP-25





2PP-25

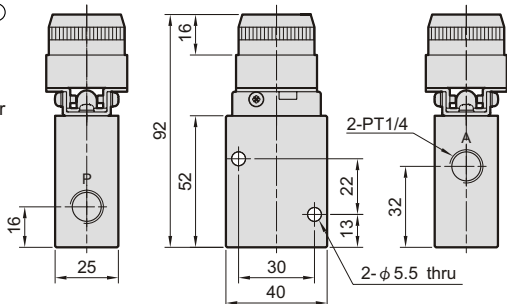

() : Dimension for button size φ30.

3R1



2R1

