


MVMB-300-4** series

MECHANICAL VALVES

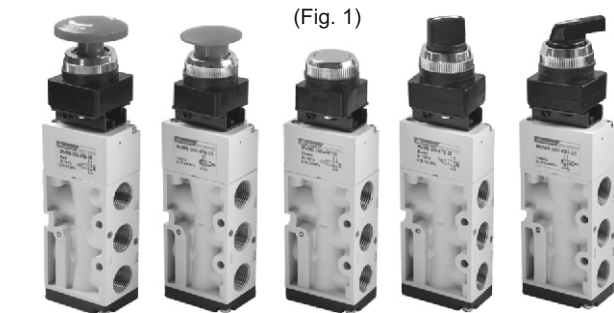

(Fig. 1)

Specification:

Model	MVMB-300-4**
Bore No.	10A
Port size	PT 3/8
No. of port	5
No. of position	2
Medium	Air
Operating pressure range	1.5~8 kgf/cm ²
Effective orifice	30 mm ²
Ambient temperature	-5~+60℃ (No freezing)
Weight	315 g

actuator-holder



(Fig. 2)

- Only show body and actuator-holder in Fig. 2
- Actuators are exchangeable with the same holder.
- Actuator set or released by one-action.

Order example:

MVMB — 300 — 4EB — 25 — BSP

MODEL

BODY WIDTH

4way





BUTTON SIZE

22: $\phi 22$ (Fig. 2)
25: $\phi 25$ (Fig. 1)
30: $\phi 30$ (Fig. 1)

B1: body (without button)
EB: latching palm button
LB: extended twist button
TB: twist button
PB: mushroom palm button
PP: push button

PORT THREAD
Blank: PT thread
BSP: BSP thread
NPT: NPT thread

MVMB-300-4B1

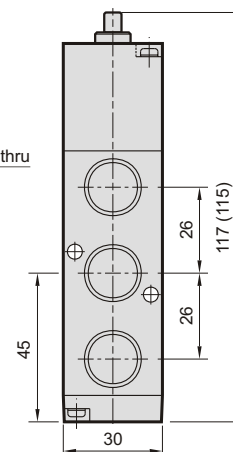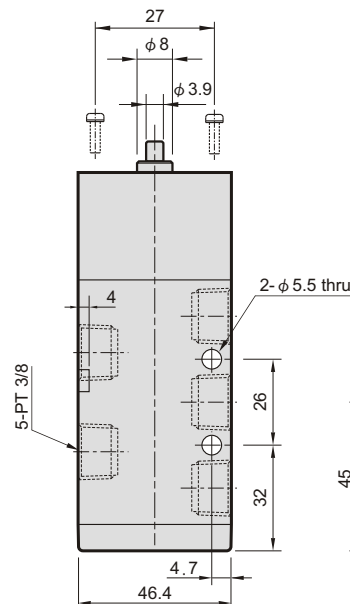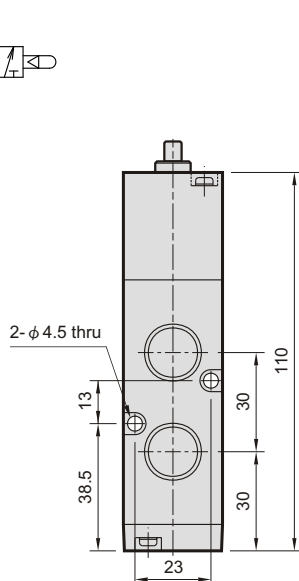


() : for EB type

MVMB-300-4** Dimensions


MECHANICAL VALVES




4EB-25

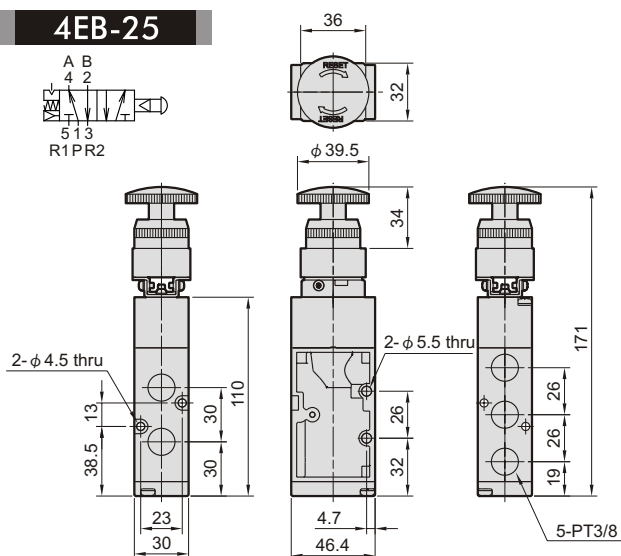


4LB-25

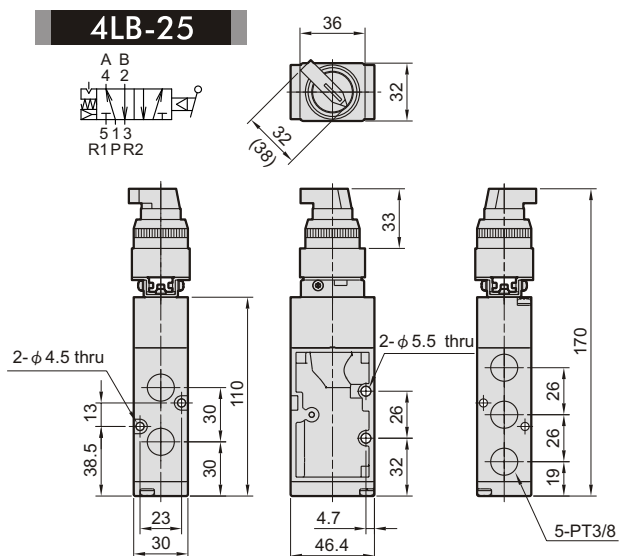


4TB-25

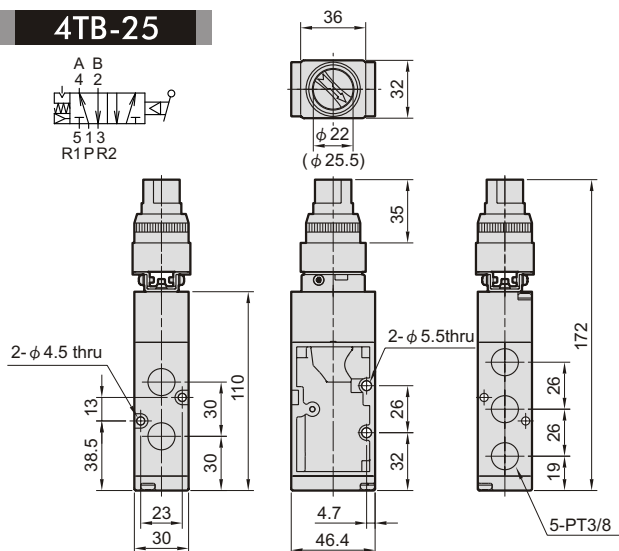

4PB-25

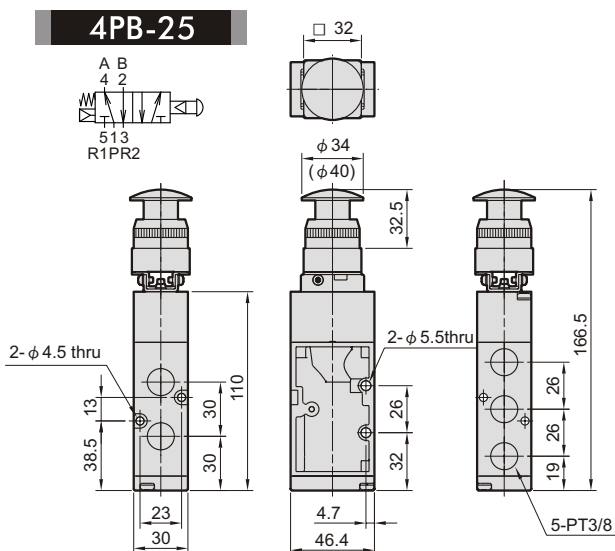

4PP-25

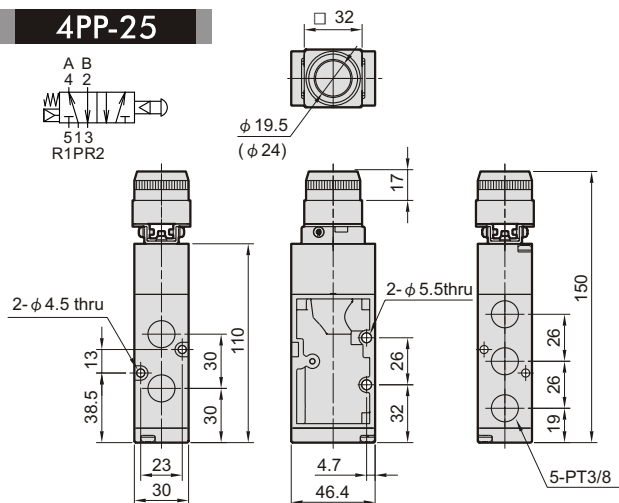

() : Dimension for button size φ 30.