


MSLC series


SILENCER THROTTLE VALVE

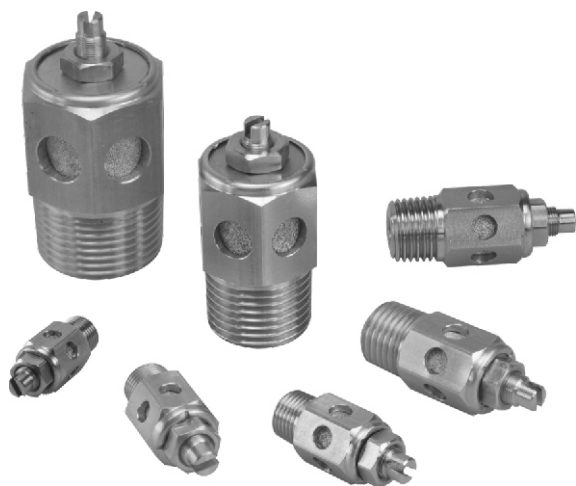


Specification:

Model	MSLC					
Bore No.	01	02	03	04	06	08
Port size	1/8	1/4	3/8	1/2	3/4	1
Medium	Air					
Operating pressure range	0~21 kgf/cm ² (0~2.1MPa)					
Proof pressure	21 kgf/cm ² (2.1MPa)					
Ambient temperature	+2℃ ~ +140℃					
Weight (g)	18	30	44	72	119	188

Order example:

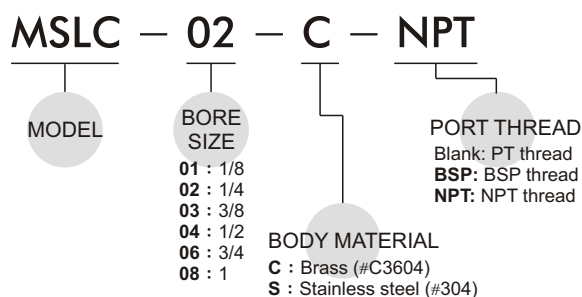

Dimensions:

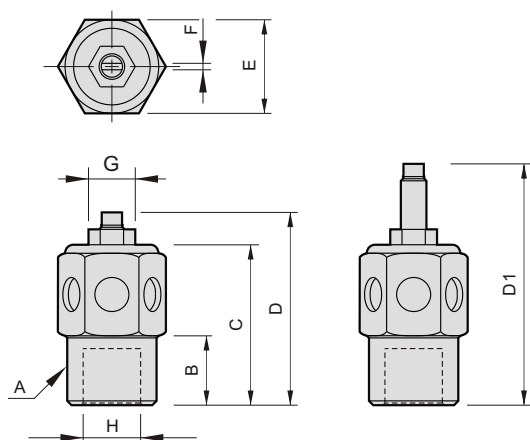

PT thread:

Code Model	A	B ±0.20	C ±0.50	D ±0.50	D1 ±0.50	E ±0.20	F ±0.20	G	H ±0.20
MSLC-01	PT 1/8	6.9	21.0	28.3	37.2	12	1.2	9	3.5
MSLC-02	PT 1/4	10.5	28.5	37.0	48.0	14	1.2	9	5.0
MSLC-03	PT 3/8	12.5	30.0	38.4	50.0	17	1.2	11	7.0
MSLC-04	PT 1/2	16.0	37.7	45.3	56.7	22	1.2	11	9.5
MSLC-06	PT 3/4	16.9	42.5	50.4	67.3	27	1.2	11	13.0
MSLC-08	PT 1	20.3	46.6	54.5	70.2	34	1.2	11	17.5

BSP thread:

Code Model	A	B ±0.20	C ±0.20	D ±0.50	D1 ±0.50	E ±0.20 S.S #304	F ±0.20 Brass	G	H ±0.20
MSLC-01	BSP 1/8	5.3	21.0	28.3	37.2	12	12	1.5	5.2
MSLC-02	BSP 1/4	8.6	28.5	37.0	48.0	17	16	1.5	5.2
MSLC-03	BSP 3/8	10.6	30.0	38.4	50.0	19	18	1.5	9.4
MSLC-04	BSP 1/2	14.1	37.7	45.3	56.7	24	24	1.5	13.4
MSLC-06	BSP 3/4	14.1	42.5	50.4	67.3	30	30	1.5	17.5
MSLC-08	BSP 1	17.6	46.6	54.5	70.2	36	36	1.5	22.6

NPT thread:

Code Model	A	B ±0.20	C ±0.50	D ±0.50	D1 ±0.50	E ±0.20	F ±0.20	G	H ±0.20
MSLC-01	NPT 1/8	6.9	21.0	28.3	37.2	12	1.2	9	5.2
MSLC-02	NPT 1/4	10.5	28.5	37.0	48.0	14	1.2	9	5.2
MSLC-03	NPT 3/8	12.5	30.0	38.4	50.0	17	1.2	11	9.4
MSLC-04	NPT 1/2	16.0	37.7	45.3	56.7	22	1.2	11	13.4
MSLC-06	NPT 3/4	16.9	42.5	50.4	67.3	27	1.2	11	17.5
MSLC-08	NPT 1	20.3	46.6	54.5	70.2	34	1.2	11	22.6