

## How to Order

K I K 38 10 - A18

①      ②                      ③                      ④

### ① Buffer style

E	External spring
I	Built-in spring

### ② Rotary type

Nil	Rotating
K	Non-Rotating

Remark: When it is external spring(E), there is no non-rotating type

### ③ Buffer stroke

10
20
30
50

### ④ Mounting connection-Male thread


Symbol	Male thread	Indent HEX
A18	M18x1	22
A20	M20x1.5	24



## Features

- ☆ With buffer spring, it can adjust height differences automatically when transfer the objects with height differences.
- ☆ Various connection thread and different stroke, it is suitable for standard vacuum pad. Wide applications.
- ☆ Touch with the fragile workpiece flexibly, buffer the impact to the object.
- ☆ Preventing rotate function is alternative.


## Dimensions (mm)

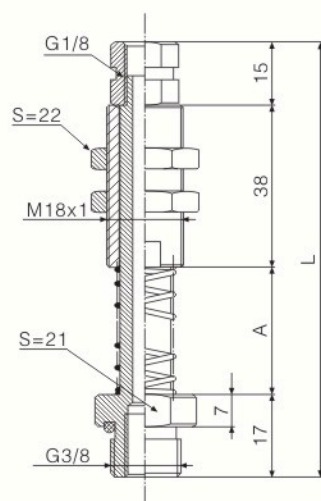

**KE38 20 -A18**

(mm)


Buffer stroke	A	L
10	20	90
20	35	105
30	50	120
50	70	140

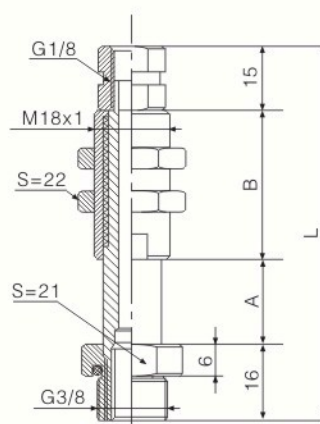

**KI38 20 -A18**

(mm)

Buffer stroke	A	B	L
10	10	24	65
20	20	35	86
30	30	46	107
50	50	66	147

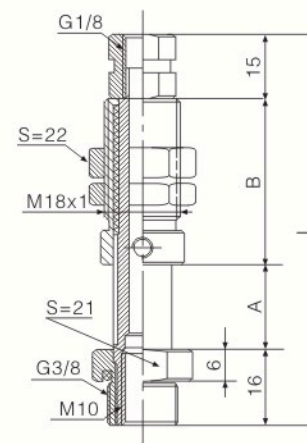

**KIK38 20 -A18**

(mm)

Buffer stroke	A	B	L
10	10	28	69
20	20	39	90
30	30	50	111
50	50	70	151