


MAFR403 series

AIR UNITS (F.R. UNIT)



Option: **MP41**

Symbol:



Specification:

Model	MAFR403		
Bore No.	8A	10A	15A
Port size	PT 1/4	PT 3/8	PT 1/2
Medium	Air		
Operating pressure range	0~9.9kgf/cm ² (0~0.99MPa)		
Proof pressure	15kgf/cm ² (1.5MPa)		
Regulated pressure range	1~8.5kgf/cm ² (0.1~0.85MPa)		
Ambient temperature	-5~+60℃ (no freezing)		
Filter element	Standard: 40 μm Option: 5 μm		
Attachment	Pressure gauge (PG-20), L-type bracket		
Weight	620 g		

※ Standard Unit contains semi-auto-drain function when operating pressure below 0.5kgf/cm².

Order example:

MAFR403 — 8A — [] — [] — BSP

MODEL

BORE SIZE

8A : PT 1/4
10A : PT 3/8
15A : PT 1/2

FILTER ELEMENT
Blank: 40 μm
5u: 5 μm

PORT THREAD
Blank: PT thread
BSP: BSP thread
NPT: NPT thread




Blank: standard

C: external pressure gauge (PG-40)

H: high pressure type

P: pressure switch (MPS series)

※ Refer to page E-15 for the option of digital pressure switch **MP41**.

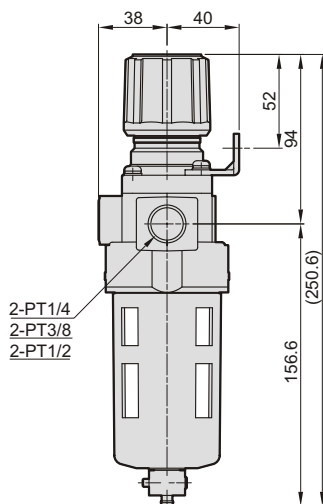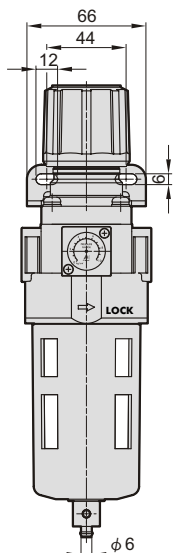

Flow feature:

