


# MVVA series


## VACUUM GENERATOR

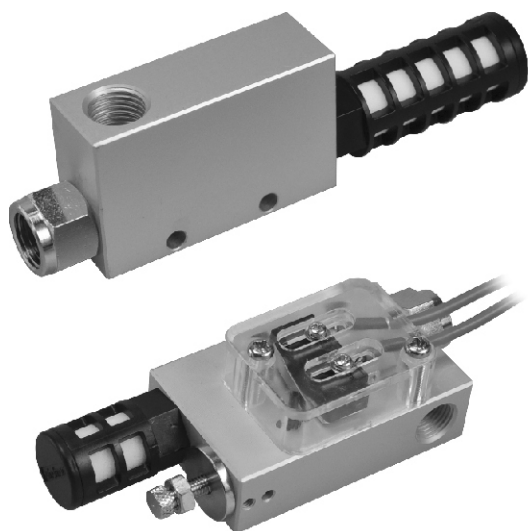

### Specification:

Model	MVVA-10	MVVA-15
Nozzle dia.	1.0 mm	1.5 mm
Port size	BSP 1/8	BSP 1/4
Medium	Air	
Operating pressure range	1~6 kgf/cm <sup>2</sup> (0.1~0.6 MPa)	
Ambient temperature	0~+60℃ (No freezing)	
Final vacuum	-91.8 kPa (-690mmHg)	
Suction flow	32 ℓ/min	63 ℓ/min
Air consumption	76 ℓ/min	100 ℓ/min
Supply pressure	5 kgf/cm <sup>2</sup> (0.5 MPa)	
Signal setting range SJ type	-20.0 ~ -90 kPa (-150 ~ -680 mm Hg)	
Lubricator	Not required	
Weight	84g, 110g (SJ)	126 g, 158 g (SJ)

### Symbol:

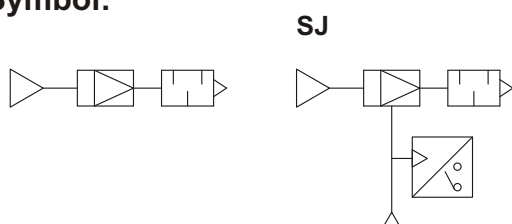

### Order example:

**MVVA - 10 - SJ**


MODEL

NOZZLE DIA.  
10: 1.0 mm  
15: 1.5 mm


Blank: Standard type  
SJ: With adjustable switch

### Vacuum characteristics:


#### MVVA-10

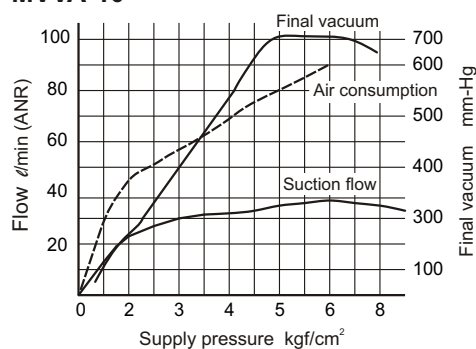


#### MVVA-15

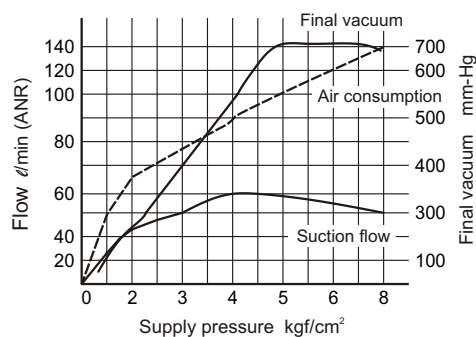


## MVVA-10

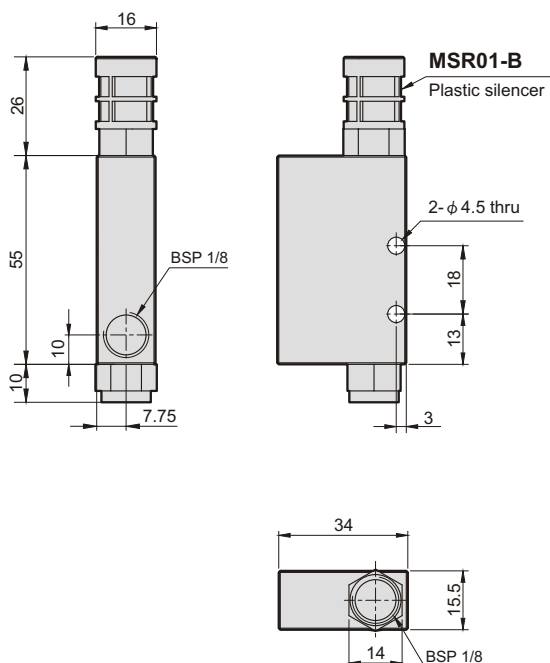

## MVVA-10-SJ

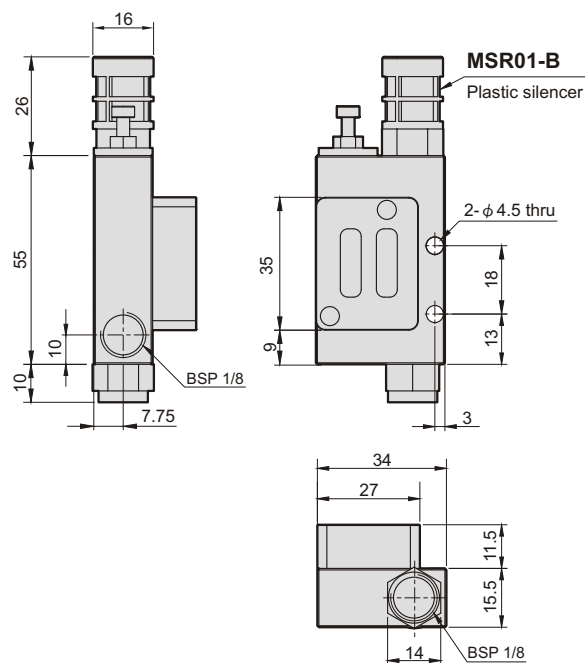

## MVVA-15

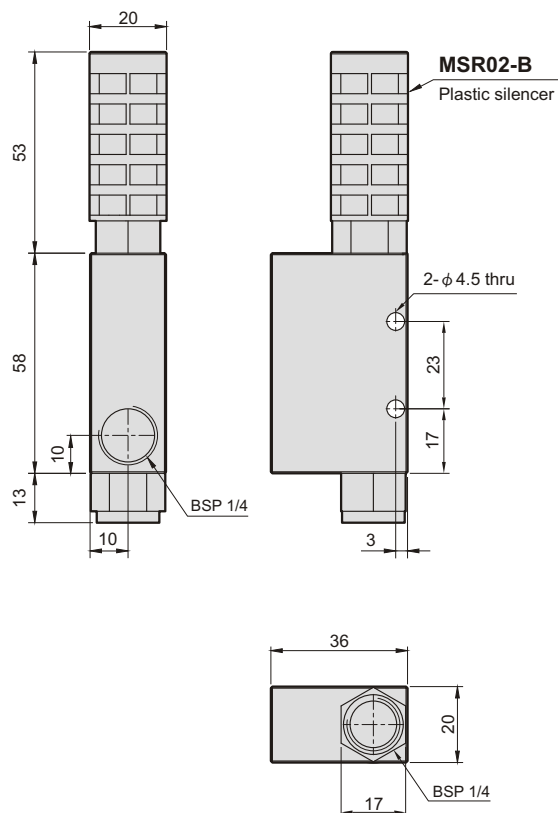

## MVVA-15-SJ

